

#15

RIC-99-027D1

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application: **Donovan**

Application Serial No.: **Unknown**

Filed: **June 22, 2001**

For: **CUSTOMER RESOURCES  
POLICY CONTROL FOR IP  
TRAFFIC DELIVERY**

§  
§  
§  
§  
§  
§  
§

Group Art Unit: **Unknown**

Examiner: **Unknown**

Attorney Docket No.: **RIC-99-027D1**



**Certificate of Mailing Under 37 C.F.R. § 1.10**

I hereby certify this correspondence is being deposited with the United States Postal Service as **Express Mail No. E1415081390US** in an envelope addressed to: Box Patent Application, Assistant Commissioner of Patents, Washington, D.C. 20231 on April 5, 2002.

By:

*Marsha S. Kappus*  
Marsha S. Kappus

Box Patent Application  
Assistant Commissioner of Patents  
Washington, D.C. 20231

**TRANSMITTAL**

Sir:

No fees are believed to be necessary at this time. However, in the event that any additional fees are required for the prosecution of this application, please charge any necessary fees to Jones, Day, Reavis & Pogue Deposit Account No. **50-0566**.

## REMARKS


1. On June 25, 2001 a Divisional Patent Application was filed under 37 CFR 1.53(b) claiming priority to Application Serial No. 09/416,101, which was in condition for allowance. The filing correspondence was sent from Jones Days Reavis & Pogue in Dallas, TX. The filing correspondence included: a New Application Utility Transmittal (PTO/SB/05); Fee Transmittal (PTO/SB/17); a copy of the parent application (09/09/416,101) including figure drawings; a preliminary amended; return postcard and a check in the amount of \$970.00. All filing documents in filing correspondence for filing the rule 53(b) divisional were properly executed.
2. The above identified application was inadvertently addressed to Box CPA rather than Box Patent Application.
3. The check was cashed by the USPTO for the divisional.
4. In the following month, WorldCom, Inc. the assignee of the parent case (09/416,101), withdrew the parent case (09/416,101) from allowance by way of filing a Request for Continued Examination (RCE) under 37 CFR 1.114, including the filing fee.
5. The filing fee was debited from the appropriate deposit account for the RCE filing.
6. In July 2001 the return postcard was received for the divisional filing without a new serial number.
7. During the following months the undersigned attempted to contact various authorities in the USPTO including the Examiner on the parent case, customer service and the Examiner's SPE, Wellington Chin.
8. At that time, contact was made with Mr. Chin by the undersigned. Mr. Chin resolved the problem and stated that the divisional was properly executed and filed under 37 CFR 1.53(b) and due a new serial number. Mr. Chin furthermore stated that one would be forthcoming.
7. During the following months, neither WorldCom nor Jones Day has received confirmation of the divisional filing or a new serial number for the divisional application.
8. During the following months, neither WorldCom nor Jones Day has been able to make contact with anyone of authority to implement Mr. Chin's decision.

9. During the recent months, neither WorldCom nor Jones Day has been able to make contact with Mr. Chin.
10. Enclosed are copies of the original filing documents including the returned postcard.
11. Please refile the present application as a divisional under 37 CFR 1.53(b) as was requested in June 2001.
12. No fees are believed necessary as USPTO received payment for this filing in June 2001.
13. Although pendency has been properly preserved, it is requested that the examination of present be moved foreword on the Examiner's docket to correspond to a June 2001 filing.

Examination of the present claims is once again requested. Claims **32-43** are pending in the present application. Claims **1-31** were canceled without prejudice and no claims were amended.

The Examiner or any individual having questions regarding the filing of the present case is invited to call the undersigned at the below-listed telephone number if, in the opinion of the that person, such a telephone conference would expedite or aid the filing, prosecution and/or examination of this application.

Respectfully submitted,

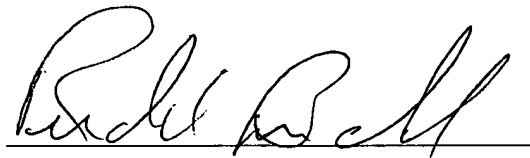

Rudolph J. Buchel, Jr.  
Reg. No. 43,448  
*Jones, Day, Reavis & Pogue*  
P.O. Box 660623  
Dallas, TX 75266-0623  
Telephone: (214) 969-2990  
Facsimile: (214) 969-5100

Date: April 05, 2002

Attorney for Applicant



TITLE OF THE INVENTION

CUSTOMER RESOURCES POLICY CONTROL FOR IP TRAFFIC DELIVERY

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates generally to the control of customer utilization of network resources, and more specifically to tracking customer resource utilization on a network and enforcing a customer utilization policy.

Discussion of the Background

Wide area networks (WANs), such as the Internet, can link many computers through a mesh of possible connections. The Internet is a collection of networks and gateways that communicate with one another using the TCP/IP suite of protocols. TCP/IP protocols and architecture are described in Liu *et al.*, "Managing Internet Information Services," O'Reilly & Associates, Inc., 1994; Comer, "Internet Working with TCP/IP Volume I: Principles, Protocols, and Architecture," 2<sup>nd</sup> ed., Prentice-Hall, Inc., 1991; Comer and Stevens, "Internet Working with TCP/IP Volume II: Design, Implementation, and Internals," Prentice-Hall, Inc., 1991; Comer and Stevens, "Internet Working with TCP/IP Vol. III: Client-Server Programming and Applications," Prentice-Hall, Inc., 1993; each of which is incorporated herein by reference.

Internet gateways are devices that provide connections between an Internet backbone and another network, such as a local area network (LAN) of a user. Internet gateways are typically dedicated computers or routers. A router is an intermediary device on a

communications network that receives transmitted messages and forwards them to their correct destinations over the most efficient available route. An Internet gateway is considered a node on the Internet, and generally performs data translation, data conversion, message handling, and protocol conversion between an Internet backbone and another network.

A backbone is a high speed network that connects local and regional networks of computers. An Internet backbone includes at least one connection point where it exchanges packets with other Internet backbones. Today, many commercial Internet providers, such as MCI Worldcom, have their own Internet backbones that span thousands of miles using microwave relays and dedicated lines.

Computer networks such as the Internet have created widespread efficiencies in the dissemination of information. However, the speed at which data is transmitted and received over the Internet can vary considerably. Data flows over even the largest communications lines can be made painstakingly slow or become interrupted due to bandwidth limitations. As the commercial and private use of networks such as the Internet continues to grow, the problem of limited bandwidth becomes greater.

Several solutions to the bandwidth limitation problem have been suggested. One such solution is simply to provide a network with extra bandwidth capability. This solution, known as over provisioning, requires that a network be provided with more communications lines and/or communications lines with greater bandwidth capability. Over provisioning is very costly, however, and wastes bandwidth resources. Moreover, even an over provisioned network may become under provisioned if the utilization of the network someday exceeds the bandwidth capability of the network.

Another solution to the bandwidth limitation problem is to control network resources on a per router interface basis. In other words, each router is provided with a utilization limit,

and when the utilization limit is exceeded, the router will accept no more data flow requests. A similar solution is to use IETF (Internet Engineering Task Force) differentiated service classes. The control of resources based on classes is discussed in Roberts, "The New Class System," October 1997, [http://www.data.com/roundups/class\\_system.html](http://www.data.com/roundups/class_system.html), which is incorporated herein by reference.

Differentiated services aggregates the packet traffic into classes and provides quality of service based on the class. It is based on the marking of the packet with a differentiated services code point (DSCP). The packet is classified at the router interface according to the DSCP by a differentiated services router and receives at each differentiated services router the quality of service treatment configured for the DSCP.

Both the control of resources based on the router interface and the control of resources based on service classes are too coarse. Specifically, these solutions track the current resources used on a per router interface basis or on a per class basis only. Consequently, these solutions do not prevent network resources from being consumed by traffic intensive applications, which deprive other applications access to these resources.

Another solution to the bandwidth limitation problem is to control network resources based on the RSVP (Resource Reservation Setup Protocol) per session signaling mechanism. RSVP is a communications protocol that can be run on a network router. RSVP is designed to provide for bandwidth on demand. Using RSVP protocol, a remote receiver or endpoint requests that a specific amount of bandwidth be reserved by a router for a data flow or data stream. The router sends back a message indicating whether or not the request has been granted. Thus, RSVP provides a reservation which is a guarantee of network resources on an individual flow basis. This technique, however, is too fine. Consequently, network resources are micro-managed on a per flow level and are not managed on a customer level.

Management on a per flow level is undesirable since network resources are typically purchased on a customer level.

Yet another solution to the bandwidth limitation problem is to deny network resource access based on the IP address of the endpoint seeking to transmit and/or receive a data flow.

This solution is extremely coarse, however, as it provides an all or nothing approach to resource allocation.

### SUMMARY OF THE INVENTION

Accordingly, one object of this invention is to provide a flexible technique to control and track the assignment and usage of network resources.

It is another object of the present invention to control network resource consumption on a customer basis.

These and other objects are achieved according to the present invention by providing a novel method, system, and computer program product for controlling customer resources for network traffic delivery. The network utilization of a group of endpoints is tracked to generate group utilization level information corresponding to a current amount of network resource consumption by the group of endpoints. A request for network resources for a data flow for an endpoint in the group is received from a router associated with that endpoint. The request for network resources includes an identifier associated with the endpoint. A determination is made whether to accept the request based on the group utilization level information, the identifier, and a first predetermined profile associated with the group and including a first network utilization limit.

If the group of endpoints is a customer, then the present invention makes it possible to track the network utilization of the customer and to determine whether to accept requests to

allocate network resources to the customer based on the tracked network utilization of the customer. Preferably, the determination whether to accept requests from the customer is made by applying a policy rule to determine whether the group exceeds one or more network utilization limits. Additionally, endpoints can be divided into reserved bandwidth service logical access points (RLAPs) which are formed by one or more groups. The network utilization of the RLAPs can be tracked in the same manner as the groups, and determinations whether to accept requests to reserve network resources can be made based on RLAP utilization level information in addition to the group utilization level information.

When requests for network resources are accepted, the group utilization level information and the RLAP utilization level information is updated to reflect the increase in the network utilization of the corresponding group and RLAP. Likewise, when a data flow ceases, the utilization level information is adjusted to reflect the decrease in network utilization by the corresponding RLAP and group. Thus, network resources can be flexibly managed on a customer level.

Network utilization can be tracked at a policy decision point that receives requests to reserve bandwidths from a router. The router is preferably a policy enforcement point (PEP) using the IETF COPS (common open policy service)-RSVP protocol or a COPS enabled RSVP router. Thus, the present invention may be conveniently implemented as an extension of the RSVP signaling process.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

A more complete appreciation of the invention and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:



Figure 1A is a schematic illustration of a computer network on which customer resources are controlled in accordance with an embodiment of the present invention;

Figure 1B shows how the endpoints in Figure 1A can be divided into reserved bandwidth service logical access ports (RLAPs) and groups;

Figure 2 is a drawing of an access control record for storing information associating an IP address of an endpoint of the computer network in Figure 1B with a corresponding access ID;

Figure 3 is a drawing of an access profile record for storing information associating an endpoint of the computer network in Figure 1B with its respective policy enforcement points (PEPs), RLAPs, and groups;

Figure 4 is a drawing of a group profile record for storing information relating to the network utilization limits of one of the groups in Figure 1B;

Figure 5 is a drawing of an RLAP profile record for storing information relating to the network utilization limits of one of the RLAPs in Figure 1B;

Figure 6 is a drawing of a flow state record for storing information about a current data flow between endpoints of the computer network in Figure 1B;

Figure 7 is a drawing of a group utilization record for storing network utilization level information for one of the groups in Figure 1B;

Figure 8 is a drawing of an RLAP utilization table for storing RLAP utilization level information for one of the RLAPs in Figure 1B;

Figure 9 is a schematic illustration showing how a data flow is established between two endpoints in the computer network in Figure 1B, using RSVP signaling;

Figure 10 is a schematic illustration showing how a data flow between two endpoints is terminated, using RSVP signaling;

Figure 11 is a schematic illustration showing another way in which a data flow may be terminated between two endpoints, using RSVP signaling;

Figures 12 and 13 are flow charts showing a process for implementing a customer resources policy control for IP traffic delivery;

Figure 14 is a flow chart showing a process for applying policy rules to control customer resources on the computer network in Figure 1B; and

Figure 15 is a schematic diagram of a general purpose computer system that can be programmed to perform the special purpose function(s) of one or more of the devices shown in the computer network in Figure 1B.

### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, wherein like reference numerals designate identical or corresponding parts throughout the several views, and more particularly to Figure 1A thereof, an illustrative computer network 100 implementing the present invention is shown. The computer network 100 includes an administrative domain 102; policy enforcement points (PEPs) 104, 106, and 108; policy decision points (PDPs) 110 and 112; rules databases 114 and 116; and endpoints 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, and 144. For ease of reference, a glossary of terms and abbreviations is provided herewith as Appendix A.

The administrative domain 102 is a collection of network elements under the same administrative control and grouped together for administrative purposes. The administrative domain 102 uses permanent connections, such as cables, and/or temporary connection made through telephone, modem, or other communication links to permit communication between various computers and other devices linked to the administrative domain 102. The

administrative domain 102 may include computers and associated devices connected by communication facilities. For example, the administrative domain 102 may be the vBNS (very high-performance backbone network services) reserve bandwidth network or any other nationwide network that supports high-performance, high-bandwidth research applications. Alternatively, the administrative domain 102 may be any backbone network (e.g., the Internet), a portion of the Internet, packet switched network, or any other wide area network (WAN).

The PEPs 104, 106, and 108 are routers or packet switches where policy decisions are enforced. These policy decisions relate to whether a path is to be established. As used herein, "a policy" is a combination of rules defining criteria for network resource access and usage. A path is a link between two nodes in a network, for example, a link between the endpoint 118 and the endpoint 144. The endpoints send the PEPs requests to establish paths using RSVP (Resource Reservation Setup Protocol) signaling or any other suitable form of signaling, protocol, or communications language. RSVP signaling is described in Braden, Zhang, Berson, Herzog, and Jamin, "Resource ReSerVation Protocol (RSVP)," Version 1 Functional Specification, September 1997, <ftp://ftp.isi.edu/in-notes/rfc2205.txt>, which is incorporated herein by reference. The IP address of each of the PEPs 104, 106, and 108 is shown adjacent each PEP in Figure 1A.

The PEPs 104, 106, and 108 are preferably COPS (common open policy service) enabled RSVP routers programmed to exercise policy-based control over RSVP usage or any other device suitable for enforcing policy decisions. A COPS enabled RSVP router preferably includes a routing function for classifying traffic and performs RSVP protocol functions for admission control, policy control, and packet classification, for example. The policy control RSVP function causes the router to function as a policy enforcement point

(PEP), which performs operations for enforcing policy server decisions with respect to a specific data flow request using the COPS protocol.

COPS is a query and response protocol that can be used to exchange policy information between a policy server (e.g., PDP 112) and its clients (e.g., PEPs 106,108). Examples of the COPS protocol are found in Boyle, Cohen, Durham, Herzog, Rajan, and Sastry, "The COPS (Common Open Policy Service) Protocol," Internet Draft, August 16, 1999, <http://www.ietf.org/internet-drafts/draft-ietf-rap-cops-07.txt>; and in Boyle, Cohen, Durham, Herzog, Rajan, and Sastry, "COPS Usage for RSVP," Internet Draft, June 14, 1999, <http://www.ietf.org/internet-drafts/draft-ietf-rap-cops-rsvp.05.txt>; both of which are incorporated herein by reference.

The PDPs 110, 112 are servers, for example, a DEC Alpha server model DS10 or any other suitable device, such as a computer or policy server on which policy decisions can be made. The PDP 110 communicates with the PEP 104, and the PDP 112 communicates with the PEP 106 and the PEP 108. Preferably, the PDPs 110 and 112 and the PEPs 104, 106, and 108 communicate using a version of the COPS protocol.

The rules databases 114 and 116 are memories, for example, random access memories (RAMs), for storing administrative policy rules for limiting access to the administrative domain 102. The administrative policy rules are used by the PDP to make policy decisions. The rules databases 114 and 116 may be internal or external to the PDPs 110 and 112.

The endpoints 118-144 are computers connected to the administrative domain 102. Endpoints 118-144 are configured to send and/or receive data flows to one another via the administrative domain 102. The endpoints 118-144 may access the administrative domain 102 by modem, dial-up networking, high-speed telephone circuits, and/or any other suitable method for accessing the administrative domain 102. The endpoints 118-144 connect to the

administrative domain 102 through one or more of the routers 104, 106, and 108. The IP address of each of the endpoints 118-144 is shown adjacent to each endpoint.

Figure 1B shows how the endpoints 118-144 of the computer network 100 can be divided into RBS logical access ports (RLAPs) 146, 148, 150, and 152. Each of the RLAPs is associated with at least one of the PDPs 110, 112. Further, the endpoints within each RLAP are subdivided into groups 154, 156, 158, 160, 162, 164, and 166. The group 154 is associated with the RLAP 146 and the PDP 110, the group 156 is associated with the RLAP 146 and the PDP 110, the group 158 is associated with the RLAP 148 and the PDP 110, the group 160 is associated with the RLAP 148 and the PDP 110, the group 162 is associated with the RLAP 150 and the PDP 112, the group 164 is associated with the RLAP 152 and the PDP 112, and the group 166 is associated with the RLAP 152 and the PDP 112. The association of endpoints into RLAPS and groups can be determined in any logical manner, for example, by using geographic proximity or network topology. If the RLAPS and/or groups correspond to customers, then network resources can advantageously be tracked and managed on a customer level.

It is emphasized that the computer network 100 of Figures 1A and 1B are for exemplary purposes only, as many variations and permutations of the hardware used to implement the present invention will be readily apparent to one having ordinary skill in the art. To implement these variations, a single computer (e.g., the computer 1500 of Figure 15) may be programmed to perform the special purpose functions of two or more of any of the devices shown in Figures 1A and 1B. For example, a single computer could be programmed to function as both a PEP and a PDP. On the other hand, by using distributed processing techniques, for example, two or more programmed computers, may be substituted for any one of the devices shown in Figures 1A and 1B.

Moreover, each endpoint may be associated with more than one group and RLAP. This may occur where an endpoint is authorized to access the administrative domain through multiple PEPs. For example, if the endpoint 136 were authorized to access the administrative domain 102 through the PEP 106 and the PEP 108, the endpoint 136 would be associated with the group 162 and the RLAP 150 when it accesses the administrative domain via the PEP 106. On the other hand, the endpoint 136 would be associated with the group 166 and the RLAP 152 when it accesses the administrative domain via the PEP 108.

The present invention stores information relating to the endpoints on the computer network, the resource utilization of RLAPs and groups, profile data for the RLAPs and groups, and the data flows occurring through the administrative domain 102. This information is stored in one or more memories such as a hard disk, optical disk, magneto-optical disk, and/or RAM, for example. One or more databases, such as the rules databases 114 and 116, may store the information used to implement the present invention. The databases are organized using data structures (e.g., records, tables, arrays, fields, and/or lists) contained in a memory such as a hard disk, optical disk, magneto-optical disk, and/or RAM, for example.

Figures 2 through 8 depict data structures used for implementing a customer resources policy control for IP traffic delivery. These data structures are used by the PDPs 110 and 112 to make policy decisions, which are enforced by the PEPs 104, 106, and 108. The data structures shown in Figures 2 through 8 are stored in the respective rules databases 114 and 116 of the PDPs 110 and 112, or any other suitable storage device. The information stored in the data structures includes identifiers for linking endpoints with their corresponding RLAPs and groups as well as utilization level information for the RLAPs and groups and predetermined profiles for the RLAPs and groups.

Figure 2 shows an access control record 200 that includes a field 202 for storing an endpoint address prefix, a field 204 for storing prefix bits, and a field 206 for storing an access ID. An access control record 200 is stored for each endpoint authorized to access the administrative domain 102 via one of the PEPs 104, 106, and 108.

The endpoint address prefix is the IP address prefix of an endpoint authorized to access the administrative domain 102 to send a data flow. The prefix bits are the number of significant bits of the IP address prefix used to determine whether a sender is authorized to access the administrative domain 102. The access ID is a link to a list of all the PEPs for each endpoint address prefix for which the sender is authorized to access the administrative domain 102. An ingress point is the access point to the administrative domain 102 for an endpoint that is sending a data flow from one endpoint to another endpoint. The access control records stored at a particular PDP may be organized into a single access control table.

Figure 3 shows an access profile record 300. An access profile record 300 is stored for every access ID. Multiple access profile records may be stored in a single access profile table. The access profile record 300 includes a field 302 for storing an access ID, a field 304 for storing ingress PEP IP addresses, a field 306 for storing an RLAP ID, and a field 308 for storing a group ID. The PEP IP addresses indicate which PEPs are authorized ingress points for the endpoint corresponding to the access ID. The RLAP ID indicates the RLAP associated with the access ID and the corresponding endpoint. For example, the RLAP 146 is associated with the endpoint 118. The group ID indicates the group associated with the access ID and the corresponding endpoint. For example, the endpoint 118 is associated with the group 154.

Figure 4 shows a group profile record 400 for storing predetermined information about one of the groups 154, 156, 158, 160, 162, 164, and 166. The predetermined

information includes maximum network utilization level information for the group. A group profile record 400 exists for each group, and the group profile records may be stored together in a group profile table. The group profile record 400 includes a field 402 for storing an over-allocation factor, a field 404 for storing group IDs, a field 406 for storing the attempt rate status of each group, a field 408 for storing the maximum attempt rate for each group, a field 410 for storing the bandwidth status for each group, a field 412 for storing the ingress token rate limit for each group, a field 414 for storing the ingress maximum peak rate, a field 416 for storing the egress token rate limit, a field 418 for storing the egress maximum peak rate, a field 420 for storing the flow time limit status, a field 422 for storing the flow time limit, and a field 424 for storing the maximum concurrent flows.

The group ID identifies the group corresponding to the group profile record 400. The attempt rate status identifies whether the attempt rate rule (discussed below with respect to Figure 14) is active for the group. The maximum attempt rate is the maximum number of times that a group can attempt to start a data flow over the administrative domain 102 in a given time period. The bandwidth status indicates whether the bandwidth rule is active for the group. The ingress token rate limit is the maximum ingress token rate, in terms of bandwidth, that can be requested by a group. The ingress maximum peak rate is the maximum ingress peak rate, in terms of bandwidth, allowed for existing data flows from a group. The egress token rate limit is the maximum egress token rate, in terms of bandwidth, that can be requested by a group for a data flow. The egress maximum peak rate limit is the maximum egress peak rate, in terms of bandwidth, allowed for an existing data flows to a group. The flow time limit status indicates whether the flow time limit rule (discussed below with respect to Figure 14) is active. The flow time limit is the maximum duration that a flow from the group may exist. Alternatively, the flow time limit may be the maximum duration



that a flow to the group may exist or the maximum duration that a flow to and from the group may exist. The maximum concurrent flows is the number of data flows that the group is permitted to have at one time. The maximum number of data flows may be separately monitored for both ingress data flows and egress data flows.

Figure 5 shows an RLAP profile record 500. An RLAP profile record exists for each RLAP, and multiple RLAP records may be stored in a single RLAP profile table. The RLAP profile record 500 includes a field 502 for storing an over-allocation factor, a field 504 for storing an RLAP ID, a field 506 for storing an attempt rate status, a field 508 for storing a maximum attempt rate, a field 510 for storing a bandwidth status, a field 512 for storing an ingress token rate limit, a field 514 for storing an ingress maximum peak rate, a field 516 for storing an egress token rate limit, a field 518 for storing an egress maximum peak rate, and a field 520 for storing maximum concurrent flows. The information stored in the RLAP record is analogous to the information stored in the group profile record 400. For example, the maximum attempt rate in field 508 is the maximum number of times that an RLAP can attempt to initiate a data flow over the administrative domain 102.

Figure 6 shows a flow state record 600. A flow state record is created for each data flow across the administrative domain 102 from one endpoint (i.e., the sender) to another endpoint (i.e., the destination). The flow state records 600 may collectively be stored in a flow state table. The flow state record 600 includes a field 602 for storing a PEP IP address, a field 604 for storing the client type, a field 606 for storing a session ID, a field 608 for storing endpoint types, a field 612 for storing a flow timer ID, a field 614 for storing a flow timer state, a field 620 for storing a path handle, a field 628 for storing a reservation handle, a field 630 for storing a reservation state status, a field 636 for storing an ingress RLAP ID, a field

638 for storing an ingress group ID, a field 640 for storing an egress RLAP ID, a field 642 for storing an egress group ID, and a field 644 for storing the bandwidth used by the flow.

The PEP IP address is the IP address for the ingress PEP for the flow. The client type identifies the type of RSVP client, (e.g., a router using COPS/RSVP protocol). The session ID identifies the session. The endpoint type identifies whether the endpoint associated with the PEP is an undetermined endpoint, an ingress endpoint, an egress endpoint, or a combined ingress and egress endpoint. The flow timer ID identifies the flow timer associated with the flow state record 600. The flow timer tracks the duration of the data flow associated with the flow state record 600. The flow timer state indicates whether the flow timer associated with the flow state record 600 is inactive or active. The path handle identifies the installed path state for the data flow. The reservation handle identifies the installed reservation state for the data flow.

The ingress RLAP ID identifies the RLAP associated with the sender at ingress. The ingress group ID identifies the group ID associated with the sender at ingress. The egress RLAP ID identifies the RLAP associated with the destination at egress. The egress group ID identifies the group associated with the destination at egress. For example, if a successful path were formed for a data flow from the endpoint 118 to the endpoint 144, the PDP 110 would be the ingress PDP, and the PDP 112, would be the egress PDP. Likewise, the PEP 104 would be the ingress PEP, and the PEP 108 would be the egress PEP.

The bandwidth used is the allocated, adjusted bandwidth request for the data flow. Thus, the bandwidth used is the amount of bandwidth resources that the flow is consuming. The bandwidth may be measured as the data flow in bits per second.

Figure 7 shows a group utilization record 700 for storing information of the network utilization (i.e., resource consumption) of a group associated with a PDP. A group utilization

record for each group associated with a PDP is stored in a database associated with the PDP (e.g., in the rules database 114 associated with the PDP 110). Each group utilization record 700 includes a field 704 for storing the group ID, a field 706 for storing the last align time, a field 708 for storing attempts, a field 710 for storing the ingress bandwidth used, a field 712 for storing the egress bandwidth used, and a field 714 for active flows. The group ID identifies the group. The last align time is the time of the last align based on the ANSI time function. The last align time is used by the attempt rate rules, which are described below with regard to Figure 14. The last align time is the time that the attempt count was last reset. The attempts is the number of flow request attempts occurring during the time period for the group. The time period is the interval during which the attempts are being counted. The attempt rate is the number of attempts over time. The time period is a predetermined value and is commonly set to 10 seconds. The ingress bandwidth used is the aggregate ingress bandwidth currently in use by the group. The egress bandwidth used is the aggregate egress bandwidth currently in use by the group. Accordingly, it can be seen that both the ingress and egress bandwidth are separately tracked for each group. Separate tracking of the ingress and egress bandwidth advantageously permits bandwidth limits to be tailored to the requirements of different customers. The active flows is the number of data flows currently active for the group.

Figure 8 shows an RLAP utilization record 800 for storing information of network resource consumption of an RLAP associated with a PDP. An RLAP utilization record 800 for each RLAP associated with a PDP is stored in a database associated with the PDP (e.g., in the rules database 114 associated with the PDP 110). The RLAP utilization records for a PDP may be stored in a single table. The RLAP utilization record 800 includes a field 804 for storing the RLAP ID, a field 806 for storing the last align time, a field 808 for storing

attempts, a field 810 for storing the ingress bandwidth used, a field 812 for storing the egress bandwidth used, and a field 814 for storing active flows. The RLAP ID identifies the RLAP corresponding to the RLAP utilization record 800. The last align time is the time of the last align for the RLAP based on the ANSI time function. The last align time at the RLAP level is used when the attempt rate rule is applied and is analogous to the last align time used at the group level. The attempts identify the number of flow request attempts occurring during a predetermined sampling period. The ingress bandwidth used is the aggregate ingress bandwidth currently in use by the RLAP. The egress bandwidth used is the aggregate egress bandwidth currently in use by the RLAP. Thus, the RLAP utilization record 800 is similar to the group utilization record 700 in that both the ingress bandwidth and the egress bandwidth are tracked. The active flows identifies the number of flows currently active for the RLAP.

Figure 9 is a schematic illustration showing exemplary message exchanges for establishing a flow from a sender to a destination. The sender of the flow is the endpoint 118 and the destination of the flow is the endpoint 144. The message exchanges shown in Figure 9 use RSVP and COPS signaling protocols; however, any suitable protocols may be used since the information used by the PDPs to implement the present invention may be encapsulated in any suitable protocol message. Thus, if the PDPs can associate the endpoints making requests with their respective groups and RLAPs and obtain information corresponding to the amount of network resources consumed and/or to be consumed by the flow, any protocol language, signaling technique, or other method of communication may be employed.

As shown in Figure 9, the PEPs 104 and 108 are COPS enabled RSVP routers. Thus, the PEPs 104 and 108 use RSVP signaling protocols to communicate with the endpoints 118

and 144, respectively, and the PEPs 104 and 108 use RSVP and COPS protocols to communicate with the PDPs 110 and 112, respectively.

To initiate the data flow, the endpoint 118 issues a path request (RSVP PATH) with an RSVP SENDER\_TSPEC object, which describes the requested token rate and peak rate traffic characteristics for the requested flow. The RSVP PATH is received by the PEP 104, which becomes the ingress access point. The PEP 104 issues a Request message type PATH (REQ PATH) to the PDP 110. The PDP 110 determines that the flow is an ingress flow relative to the PDP 110, applies policy rules (described below with reference to Figure 14), installs ingress path state, and returns a decision command to install the flow (DEC Install) to the PEP 104 if none of the policy rules are violated. Next, the PEP 104 forwards the RSVP PATH downstream to the PEP 108, which serves as the egress access point in this example. Upon receiving the RSVP Path from the PEP 104, the PEP 108 issues REQ PATH to the PDP 112, which is the egress PDP in this example. The PDP 112 determines that the flow is an egress flow relative to the PDP 112, applies policy rules, and installs egress path state. Then the PDP 112 returns DEC Install to the PEP 108 if none of the policy rules are violated. Then, the PEP 108 forwards the RSVP PATH downstream to the endpoint 144. If a policy rule is determined to be violated by the PDP 110 or the PDP 112, then the PDP at which the violation occurred will not issue a DEC Install to the corresponding PEP. Instead, the PDP will issue a DEC Remove to the corresponding PEP, and consequently, the RSVP PATH will not be forwarded from that PEP.

Assuming that the RSVP PATH was successfully forwarded from the endpoint 118 to the endpoint 144, the endpoint 144 must successively return an RSVP reservation message (RSVP RESV) to the endpoint 118 in order for a flow to be initiated. The endpoint 144 forwards the RSVP RESV to the PEP 108. The RSVP RESV specifies traffic characteristics

such as token rate and peak rate. The PEP receives the RSVP RESV and then issues a Request message type RESV (REQ RESV) to the PDP 112. The PDP 112 determines that the data flow is an egress data flow relative to the PDP 112, administers policy rules, adjusts network utilization level information for the corresponding group and RLAP, and installs a reservation state. If no policy rules are violated, the PDP 112 returns DEC Install to the PDP 108. In response to receiving the DEC Install from the PDP 112, the PEP 108 acknowledges the decision by sending a report commit (RPT Commit) to the PDP 112, and then the PEP 108 forwards the RSVP RESV to the PEP 104. As a result, the PDP 112 updates or adjusts the egress network utilization information for the RLAP 152 and the group 166 corresponding to the endpoint 144. Then, the PEP 104 sends REQ RESV to the PDP 110. The PDP 110 determines that the data flow is an ingress data flow relative to the PDP 110, applies policy rules, adjusts the network utilization level information for the corresponding RLAP 146 and group 154 if none of the policy rules are violated, and installs the reservation state. Then, the PDP 110 sends a DEC Install to the PEP 104 and updates the ingress network utilization information for the RLAP 146 and the group 154 corresponding to the endpoint 118. In turn, the PEP 104 returns an RPT Commit to the PDP 110, forwards the RSVP RESV to the endpoint 118, and a successful flow is established from the endpoint 118 to the endpoint 144.

Figures 10 and 11 are schematic illustrations showing exemplary message exchanges for discontinuing the flow established in Figure 9. Figure 10 shows how a path is discontinued (i.e., how a path teardown is performed). An RSVP PathTear message is initiated by the endpoint 118. The RSVP PathTear message can also be initiated by a router, such as one of the PEPs 104 and 108. The PEP 104 receives the RSVP PathTear request from the endpoint 118. The PEP 104 forwards the RSVP PathTear message to the PEP 108. The PEP 108 forwards the RSVP PathTear message to the endpoint 144. When the RSVP

PathTear message is received at the PEP 104, a delete request state (DRQ) is sent from the PEP 104 to the PDP 110 for the corresponding path state. The PDP removes the associated state upon receiving the DRQ. Likewise, when the PEP 108 receives the RSVP PathTear message from the PEP 104, the PEP 108 issues a DRQ to the PDP 112. Regardless of the architecture and/or specific protocol used, a teardown may be used to initiate the adjustment of the network utilization levels.

Figure 11 is a schematic illustration showing exemplary message exchanges involved in a successful teardown of a reservation state. The endpoint 144 initiates a RSVP ResvTear message, which is sent to the PEP 108. Alternatively, the RSVP ResvTear message can be initiated by an RSVP router, such as the PEP 104 or the PEP 108. Upon receiving the RSVP ResvTear message from the endpoint 144, the PEP 108 forwards the RSVP ResvTear message to the PEP 104 and issues a DRQ to the PDP 112. Upon receiving the RSVP ResvTear message from the PEP 108, the PEP 104, forwards the RSVP ResvTear message to the endpoint 118 and issues a DRQ to the PDP 110. Upon receiving the respective DRQs, the PDPs 110 and 112 remove the associated reservation states.

When the PDPs 110 and 112 receive a DRQ request, the PDPs 110 and 112 adjust the network utilization level information for the corresponding RLAPs and groups to reflect the resulting increase in the availability of network resources. In this manner, the group and RLAP utilization tables are tracked and updated. As with the creation of a successful path, any suitable protocol language may be used to discontinue the flow between the endpoints 118 and 144. As long as the PDPs 110 and 112 receive a message indicating that the data flow has ended, the PDPs 110 and 112 can update, and thereby track, the RLAP and group network utilization levels.

Figures 12 and 13 are flow charts describing the process for implementing a customer resources policy control for IP traffic delivery. In step 1200 the endpoints 118-144 of the computer network 100 are divided into RLAPs 146, 148, 150 and 152. The RLAP 146 is divided into groups 154 and 156. The RLAP 148 is divided into groups 158 and 160. The RLAP 150 forms a single group 162. The RLAP 152 is divided into groups 166 and 164. Preferably, the groupings into RLAPs and groups are logical. Moreover, the groups and RLAPS are not necessarily constrained by the physical topology of the network. For example, the groups can correspond to the endpoints in a single building or city, and the RLAPs can correspond to a particular customer of the administrative domain 102.

Next, in step 1210 the network utilization of the groups and the RLAPs is tracked to generate group and RLAP utilization level information. The group and RLAP utilization level corresponds to the current amount of network resource consumption by the groups and RLAPS, respectively. The network utilization of the groups is tracked using information stored in group utilization records such as the group utilization record 700. Likewise, the network utilization level of the RLAPs is tracked using information stored in RLAP utilization records such as the RLAP utilization record 800. The network utilization levels are adjusted as the PDPs 110 and 112 receive messages from the PEPs 104 and 108 indicating that flows are being created or discontinued.

In step 1220, a PDP (e.g., the PDP 110) receives a request for network resources (e.g., a request to reserve bandwidth) for a flow. This request is preferably received, from a PEP (e.g., the PEP 104), which is associated with RLAP 146 and groups 154 and 156, but may also be received from any device for making flow requests.

Then, in step 1230, the PDP 110 determines whether the request for network resources is to be accepted by applying at least one policy rule. The policy rules are applied based on



the group and RLAP utilization level information stored in the corresponding group utilization record 700 and RLAP utilization record 800, information identifying the group and RLAP associated with the endpoint making the request (obtained from the access profile record 300, for example), and predetermined profiles for the corresponding group and RLAP stored in the corresponding group profile record 400 and RLAP profile record 500.

Next, in the step 1240 the PDP 110 informs the PEP 104 of the result of the determination whether to grant the request for network resources for the sender.

Assuming the request for network resources and for establishment of a data flow is accepted by the PDP 110, the group and RLAP utilization levels are adjusted to reflect the acceptance of the request and the decrease in available bandwidth for the corresponding group and RLAP in step 1300, as shown in Figure 13. Once the data flow is discontinued, the PDP 110 receives a request corresponding to the discontinuance of the flow in step 1310. Then, in step 1320, the PDP adjusts the group and RLAP utilization levels to reflect the corresponding increase in the network resources that are available for the RLAP and the group.

Figure 14 is a flow chart showing how the policy rules are applied in step 1230 of Figure 12. In step 1400 an access control rule is applied to determine whether the endpoint making the request is authorized for network ingress and/or egress and to ascertain which group and RLAP profile records are associated with the endpoint. This is possible because the endpoint address prefix is sent to the PDP corresponding to the PEP from which the request originates. The PDP examines its access control records to determine whether there is an access control record (e.g., the access control record 200) having an endpoint address prefix that matches the endpoint making the request. Each access control record includes prefix bits information which indicates the number of significant digits to be examined in comparing the endpoint IP addresses with the endpoint address prefixes stored in the access

control records. If a match is found, (i.e., if an access control record 200 exists for the endpoint making the request), then the access ID is obtained from the access control record 200 for that endpoint. The access ID is used to find the corresponding access profile record (e.g., the access profile record 300). When an access profile record having the same access ID as the access control record is found, the IP address of the PEP originating the request (i.e., the ingress PEP IP address) is used to determine the RLAP ID and the group ID associated with the endpoint making the request. This is possible because the ingress PEP IP address is linked to the corresponding RLAP ID and group ID in the access profile record. If the sending endpoint is not authorized, the destination endpoint IP address can be examined to determine whether there is an access control record corresponding to the endpoint IP address. If an access control record 200 is found for the destination and the IP address for the PEP originating the request, i.e., the ingress PEP IP address (listed in the destination endpoints' access profile record), the access control rule is not violated. The access control rule is violated or fails when the sender has no access control record, or both the sender and the destination have an access control record but neither has an access profile record with an ingress PEP IP address that matches the PEP IP address of the PEP originating the request.

When the access control rule fails, the request is denied and no further rules need to be examined. A feature of the access control rule is that the PEP that the PDP is serving can be determined. This information is used for subsequent application of policy rules that are dependent upon the identification of the corresponding PEP, RLAP, and/or group. Using the prefix bits information, the endpoint address prefix, and the access control records, a longest prefix, match can be used to find the access control record corresponding to the sender. Further, the PDP can determine whether it is an ingress access point or an egress access point during the application of the access control rule. Specifically, if the sender has an access

control record and the PEP originating the request is listed as an ingress PEP IP address in the access profile record corresponding to the sender, then the PDP is an ingress access point.

The PDP is an egress access point in the following circumstances: (1) it is not the ingress access point, (2) the destination has an access control record, and (3) the PEP originating the request has an IP address listed in the destination's access profile record. The PDP may also serve as both an ingress access point and an egress access point for a particular request.

In step 1410 of Figure 14, an attempt rate rule is applied. The attempt rate rule is invoked by a new path request. The PDP ascertains the maximum attempt rates in the RLAP and group profile records 500 and 400, respectively. The appropriate RLAPs and groups are identified during the application of the access control rule, as noted above. A quantum window algorithm can be used, making it unnecessary to continuously monitor the number of attempts. The quantum window algorithm is an algorithm applied inline during attempt rate feature processing. At each align time interval, a counter is refreshed with the attempt value defined for the respective group and RLAP. Each time the attempt rate feature is executed, the difference between the current time and the last align time is compared with the configured attempt rate time period. If the difference is less than the attempt rate time period the counter is decremented, otherwise the counter is refreshed with the predefined number of attempts and the last align time is updated with the current time. If the maximum rate is not exceeded, the request passes the attempt rate rule, otherwise the attempt rate rule is violated and the request fails. The attempt rate rule is applied to the RLAP first and then to the group. However, this ordering may be switched if desired.

Alternatively, the path request attempts for the group and the RLAP can be separately tracked and stored in the corresponding group utilization record and the RLAP utilization record, respectively. If the attempts stored in the group utilization record exceed the

maximum attempt rate stored in the group profile record, then the attempt rate rule is violated. Likewise, if the number of attempts stored in the RLAP utilization record exceeds the maximum attempt rate in the RLAP profile record, then the attempt rate rule is violated. The attempt totals stored in the RLAP utilization record and the group utilization record may be reset periodically so that the attempts represent the attempts per a predetermined amount of time defined by the length of time from the last reset.

In step 1420 bandwidth rules are applied to determine whether acceptance of a path or reservation request would cause the maximum allowable bandwidths for the group and RLAP to be exceeded. The bandwidth rule is invoked in response to a path request and in response to a reservation request. In this manner, a bandwidth corresponding to ingress and egress data flows are separately monitored. The different bandwidth rules may be applied separately or in any desirable combination and in any order. The first bandwidth rule determines whether a data flow's requested traffic characteristics exceed a predetermined limit (i.e., the ingress token rate limit or the egress token rate limit, depending upon whether the PDP is an ingress or an egress access point) for the corresponding group profile record 400 and RLAP profile record 500. This check may be performed on an individual flow request level as well as on an aggregate bandwidth usage level for the RLAP and the group. The sender's RLAP and group profile records are used for bandwidth checks at the ingress point, and the destination's RLAP and group profile records are used for bandwidth checks at the egress point. The requested bandwidth data traffic parameters (e.g., peak rate and token rate) are compared against the predetermined limits for the group and for the RLAP, which are stored in the corresponding group utilization record and RLAP utilization record, respectively. If the RLAP limits are exceeded, the request fails and no further rules are applied. Likewise, if the group limits are exceeded, the request fails and no further rules are applied.

The aggregate bandwidth in use by the RLAP is evaluated if the traffic data parameters do not exceed the limits for the individual path request. An adjusted bandwidth request is determined by weighting the ingress token rate limit (or the egress token rate limit, if the PDP is an egress access point) with the amount of additional bandwidth that could potentially affect the available bandwidth. The adjusted bandwidth is the sum of the token rate limit and the weighted peak rate. The weighted peak rate is the difference between the token rate limit and the peak rate limit, multiplied by the ratio of the peak rate to the remaining, unassigned bandwidth. When the peak rate limit is less than or equal to the token rate limit, the token rate limit is used for the adjusted bandwidth request. Thus, the formula for adjusted bandwidth request is as follows:

$$ABR = TR + [(PR - TR) * (PR \setminus UB)],$$

where ABR is the adjusted bandwidth request, TR is the token rate, PR is the peak rate, and UB is the unassigned bandwidth.

The unassigned bandwidth (UB) is the difference between the maximum bandwidth and the bandwidth in use. The available bandwidth is equal to the over-allocation factor multiplied by the unassigned bandwidth. The over-allocation factor is a value that permits the network manager to optimize network resource control by making allowance for the fact that unsignaled requests result in actual flows and let the bandwidth be "over allocated" by granting requests. Over-allocation is analogous to an airline over-booking reservations for a flight. For example, when the network manager determines, via analysis of usage patterns, that 10% of a customer's requests for bandwidth do not result in actual data flows the manager would configure an over-allocation factor of 1.1 for the customer group. The over-allocation factor, if used, may be stored in the group and RLAP profile records in the fields 402 and 502, for example. The available bandwidth is compared to the adjusted bandwidth

request. The bandwidth rules are not violated if the adjusted bandwidth request does not exceed the over-allocated; available amount. The adjusted bandwidth request is stored in a flow state record (e.g., the flow state record 600) in the field 644 as part of the bandwidth used information. Additionally, the adjusted bandwidth request added to the RLAP aggregate bandwidth in use, which is stored in the RLAP utilization record (e.g., RLAP utilization record 800) in either the field 810 or the field 812, depending on if the flow is ingress or egress, respectively. The type of flow (i.e., ingress or egress) is determined during access control and is stored in the field 608 of the flow state record when the reservation request is successfully completed.

The aggregate bandwidth in use by the group is evaluated if the traffic data parameters do not exceed the limits stated above for the RLAP. The group aggregate bandwidths are calculated in a similar manner as the RLAP bandwidth aggregate, with the group profile and utilization records being used instead of the RLAP profile and utilization records. Regardless of whether the bandwidth feature is authorized and activated or not, the adjusted rate request is stored along with the flow state information (bandwidth used in field 644), and the adjusted rate request is accounted for in the determination of the aggregate bandwidth in use.

The profile and utilization information for both the sender and the destination are involved with bandwidth processing on both the RLAP and the group level. The profile and utilization data associated with the sender are used for the ingress bandwidth calculations at the ingress point. The profile and utilization data associated with the destination are used for the egress bandwidth calculations at the egress point.

Upon successful completion of a reservation request, the RLAP and group utilization bandwidth aggregates are adjusted. The requested bandwidth is added to the ingress aggregates of the sender's RLAP and group utilization data at the ingress point. The

requested bandwidth is added to the egress aggregates of the destination's RLAP and group utilization data at the egress point. Subsequent requests to change the resource requirements for existing reservations are reflected in the aggregates.

When a data flow is terminated (for example, when a DRQ is received by a PDP), the individual bandwidth associated with a data flow is deducted from the RLAP and group bandwidth aggregates. The ingress aggregates are those values corresponding to the sender of the flow. The egress aggregates are those values corresponding to the destination of the flow. If the requested bandwidth exceeds the ingress maximum bandwidth at the ingress point or exceeds the egress maximum bandwidth at the egress point, the bandwidth rule is violated and the request fails.

In step 1430 maximum concurrent flow rules are invoked. These rules may be invoked in response to a path request and/or in response to a reservation request. The PDP determines whether acceptance of a requested flow would result in the maximum number of concurrent flows being exceeded for both the RLAP and the group. This is performed by comparing the information of the number of active flows stored in the RLAP and group utilization records with the corresponding information of the maximum concurrent flow limits stored in the RLAP and group profile records. Preferably, the maximum concurrent flow rule is applied to the RLAP before being applied to the group; however, any ordering may be used. The maximum concurrent flow rules are applied based on the sender's group profile record (e.g., the group profile record 400), RLAP profile record (e.g., the RLAP profile record 500), group utilization record (e.g., the group utilization record 700), and RLAP utilization record (e.g., the RLAP utilization record 800). If the maximum concurrent flow rule is not violated, the active concurrent flow counts are incremented in the corresponding group and RLAP utilization records to reflect the increase in resource

consumption. Regardless of whether the maximum concurrent flow rule is authorized and activated or not, the concurrent active flows count is preferably incremented for a successful reservation request. When a path is discontinued and a DRQ is received by PDP, the active concurrent flow counts are decremented for both the group and RLAP utilization records to reflect the decrease in resource consumption.

In step 1440 of Figure 14, flow time limit rules are applied to determine whether the maximum allowable flow time of an existing data flow exceeds the flow time limit for the group. Alternatively, the flow time limit rule may be applied to the RLAP or to both the group and RLAP. The flow time limit rule is invoked upon confirmation of a successful reservation request. Upon confirmation of a new reservation request at the ingress PEP, a flow time limit timer for the reservation request is started. A subsequent request to change a reservation does not reset or impact the timer for the flow. Likewise, a subsequent reservation error request does not reset or impact the timer for the flow. The flow is periodically monitored during its existence by the ingress PDP to determine whether its duration has exceeded the predetermined flow time limit stored in the group profile record corresponding to the sender. If the data flow is active for a length of time exceeding the flow time limit, the ingress PDP changes the flow state to "expired" and issues an unsolicited decision message instructing the corresponding PEP to remove the flow.

Accordingly, it can be appreciated that the present invention provides a customer resources policy control for IP traffic delivery. Policy rules are implemented on a per customer basis, as defined by the groups and RLAPs of the computer network.

In most of the examples provided above, the invention was described in terms of IETF architecture using COPS and RSVP protocols. However, any suitable protocols may be used concurrently with, or in place of, COPS and/or RSVP protocols. Moreover, all or a portion of



the invention may be conveniently implemented using conventional general purpose computers or microprocessors programmed according to the teachings of the present invention, as will be apparent to those skilled in the computer art. Appropriate software can be readily prepared by programmers of ordinary skill based on the teachings of the present disclosure, as will be apparent to those skilled in the software art.

Figure 15 is a schematic illustration of a computer system 1500 for implementing the method of the present invention. The computer system 1500 includes a computer housing 1502 for housing a mother board 1504, which contains a CPU 1506, a memory 1508 (e.g., random access memory (RAM) dynamic RAM (DRAM), static RAM (SRAM), synchronous DRAM (SDRAM), flash RAM, read-only memory (ROM), programmable ROM (PROM), erasable PROM (EPROM), and electrically erasable PROM (EEPROM)), and other optional special purpose logic devices (e.g., application specific integrated circuits (ASICs)) or configurable logic devices (e.g., generic array of logic (GAL) or reprogrammable field programmable gate arrays (FPGAs)). The computer system 1500 also includes plural input devices, such as a keyboard 1522 and a mouse 1524, and a display card 1510 for controlling a monitor 1520. In addition, the computer system 1500 further includes a floppy disk drive 1514; other removable media devices (e.g., a compact disc 1519, a tape, and a removable magneto-optical media); and a hard disk 1512, or other fixed, high density media drives, connected using an appropriate device bus (e.g., a small computer system interface (SCSI) bus, and enhanced integrated device electronics (IDE) bus, or an ultra-direct memory access (DMA) bus). The computer system 1500 may additionally include a compact disc reader 1518, a compact disc reader-writer unit, or a compact disc juke box, each of which may be connected to the same device bus or another device bus. Although the compact disc 1519 is shown in a CD caddy, the compact disc 1519 can be inserted directly into CD-ROM drives

which do not require caddies. In addition, a printer may provide printed listings of the data structure shown in Figures 2-8 or any other data stored and/or generated by the computer system 1500.

As stated above, the system includes at least one computer readable medium or memory programmed according to the teachings of the invention and for containing data structures, tables, records, or other data described herein. Examples of computer readable media are compact discs, hard disks, floppy disks, tape, magneto-optical disks, PROMs (EPROM, EEPROM, Flash EPROM), DRAM, SRAM, SDRAM, etc. Stored on any one or on a combination of computer readable media, the present invention includes software for controlling both the hardware of the computer 1500 and for enabling the computer 1500 to interact with a human user (e.g., a consumer). Such software may include, but is not limited to, device drivers, operating systems and user applications, such as development tools. Such computer readable media further includes the computer program product of the present invention for performing all or a portion (if processing is distributed) of the processing performed in implementing the invention. The computer code devices of the present invention can be any interpreted or executable code mechanism, including but not limited to scripts, interpreters, dynamic link libraries, Java classes, and complete executable programs. Moreover, parts of the processing of the present invention may be distributed for better performance, reliability, and/or cost.

The invention may also be implemented by the preparation of application specific integrated circuits or by interconnecting an appropriate network of conventional component circuits, as will be readily apparent to those skilled in the art.

Obviously, numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope

of the appended claims, the invention may be practiced otherwise than as specifically described herein.

## APPENDIX A

### GLOSSARY OF TERMS AND ABBREVIATIONS

**Access Point** — The access point is the point that a data flow enters or exits the administrative domain.

**Address Prefix** — An address prefix is the leading portion of an IPv4 address or IPv6 address, plus an integer defining the number of leading bits to use in longest match comparisons. Address Prefix's do not overlap Groups.

**DEC Install** — DEC Install is a COPS decision operation that signifies the request is granted. This results in the PEP installing state for the flow associated with the request.

**DEC Remove** — DEC Remove is a COPS decision operation that signifies the request is denied. The PEP does not install state for the flow requested with the request.

**Decision** — A Decision is a response sent from PDP to PEP based on administrative rules.

**DRQ** — Delete Request State. A DRQ is a COPS operation where the PEP sends the DRQ to the PDP that indicates that the state associated with the request is to be removed. This is sent in the case of teardown.

**Egress** — An egress is the sender's exit, or departure point from the administrative domain. Since RSVP is unidirectional, the egress point is always from the sender's perspective; however, the sender's egress point would be the destination's ingress point.

**Egress Bandwidth** — Egress bandwidth is the bandwidth utilized by the destination of a flow.

**Endpoint** — An endpoint is the RSVP host sender or destination and is designated by an IPv4 or IPv6 address. Endpoints can access the network through multiple routers.

**Flow** — A flow is a particular data flow between a sender and a destination.

**Ingress Bandwidth** — The ingress bandwidth is the bandwidth utilized by the sender of a flow.

**Group** — A group is a set of endpoints that share the same rules as designated by the Group Profile. Multiple groups can be designated within a RLAP. A group can consist of one or more members.

**Ingress** — Ingress is the sender's entrance, or access point into the administrative domain. Since RSVP is unidirectional, the ingress point is always from the sender's perspective; however, the sender's ingress point would be the destination's egress point.

**Path** — Path is an RSVP operation sent by the sender to the receiver requesting a reservation. It follows the same route that the data flow of the reservation is to follow.

**Peak Rate** — Peak rate is the number of continuous, uninterrupted bytes per second that are transmitted. Thus, peak rate is the instantaneous byte rate or an approximation thereof.

**Policy** — A policy is the combination of rules and services where rules define the criteria for resource access and usage.

**PEP** — Policy Enforcement Point. A PEP is where policy decisions are actually enforced.

**PDP** — Policy Decision Point. A PDP is where policy decisions are made.

**RBS** — Reserved Bandwidth Service. An RBS is a service utilizing administrative policy rules to restrict access to an administrative domain.

**Report** — A Report is a message sent from PEP to PDP which notifies PDP of a condition on the PEP.

**Request** — A Request is a message sent from PEP to PDP which makes some request on behalf of an RSVP flow.

**Reservation** — A reservation is an RSVP operation sent by the receiver to the sender to reserve network resources at each node along a path between the receiver and the sender.

**REQ PATH** — REQ PATH is a COPS operation that is sent by the PEP to the PDP that is making a policy request that contains RSVP Path message information.

**REQ RESV** — REQ RESV is a COPS operation that is sent by the PEP to the PDP that is making a policy request that contains RSVP Reservation message information.

**RESV STATE** — RESV STATE is the state associated with the reservation of an RSVP data flow. The reservation state is associated with allocating with network resources required for the RSVP flow.

**RLAP** — RBS Logical Access Port. An RLAP is a logical grouping of IPv4 or IPv6 addresses. Multiple RLAPs can be designated for a PEP. RLAP address groupings apply to one PEP. Preferably, all endpoints in an RLAP are capable of accessing the administrative domain through the same PEP.

**RPT Commit** — RPT Commit is a COPS operation that the PEP sends to the PDP that acknowledges the installation of the state associated with the preceding DEC Install sent by the PDP to the PEP.

**RSVP** — Resource Reservation Protocol.

**RSVP PATH** — RSVP PATH is the RSVP operation sent by the sender to a receiver requesting that a reservation for a path be established.

**RSVP PATHTEAR** — RSVP PATHTEAR is the RSVP operation sent by the sender towards the receiver indicating that the data flow is terminated.

**RSVP RESVTEAR** — RSVP RESVTEAR is the RSVP operation sent by the receiver towards the sender indicating that data flow is terminated.

**Session** — A session is a data flow (e.g., an RSVP data flow) with a particular destination and transport-layer protocol. It is defined by the five tuple: (DestAddress, ProtocolId, DestPort, SrcAddress, SrcProt).

**State** — State is information specific to an entity (e.g. a data flow) that reflects a stage or phase.

**Token Rate** — Token rate is the sustained number of bytes per second that are transmitted. Thus, the token rate is the average byte rate.

**CLAIMS:**

1. A method for controlling customer resources for network traffic delivery, comprising:

tracking network utilization of a group of endpoints on a network to generate group utilization level information corresponding to a current amount of network resource consumption by the group;

receiving a message corresponding to a request for network resources for a data flow for one of the endpoints, the request including an identifier associated with the one endpoint; and

determining whether the request is to be accepted based on the group utilization level information, the identifier, and a predetermined profile, the predetermined profile being associated with the group and including a network utilization limit.

2. The method of claim 1, wherein the step of receiving comprises:

receiving the request from one of a router and a packet switch, associated with the one endpoint; and

wherein the method further comprises the step of:

forwarding to the router the result of the decision whether to accept the request.

3. The method of claim 2, wherein the router is a policy enforcement point (PEP), and the method further comprises the step of:

receiving, from the PEP, the request for network resources for a data flow for the one endpoint.



4. The method of claim 3, further comprising the step of:  
performing the steps of tracking, receiving, and determining on a server that forms a policy decision point.

5. The method of claim 1, wherein the step of determining comprises the step of:  
applying a policy rule, using the group utilization level information, the identifier, and the predetermined profile to determine whether the group exceeds the network utilization limit.

6. The method of claim 5, wherein the policy rule in the step of applying comprises:  
an access control rule, an attempt rate rule, a bandwidth rule, a maximum concurrent flow rule, and a flow time limit rule.

7. The method of claim 1, wherein the group is associated with a reserved bandwidth service logical access port ( RLAP) and the method further comprises the steps of:

tracking network utilization of the RLAP, the RLAP including the one endpoint to generate RLAP utilization level information corresponding to a current amount of network resource consumption by the RLAP; and

wherein the step of determining comprises the step of:  
determining whether the request is to be accepted based on the RLAP utilization level information and another predetermined profile that is associated with the group, includes a corresponding network utilization limit.

8. The method of claim 1, further comprising the step of:

adjusting the group utilization level information, when the request is accepted, to reflect the installment of the request and the corresponding increase in network resources consumption.

9. The method of claim 8, further comprising the step of:

receiving another message corresponding to a discontinuance of the data flow and to the availability of network resources formerly consumed by the data flow; and

adjusting the group utilization level information to reflect the availability of the network resources formerly consumed by the data flow.

10. A system for controlling customer resources for network traffic delivery, comprising:

means for tracking network utilization of a group of endpoints on a network to generate group utilization level information corresponding to a current amount of network resource consumption by the group;

means for receiving a message corresponding to a request for network resources for a data flow for one of the endpoints, the request including an identifier associated with the one endpoint; and

means for determining whether the request is to be accepted based on the group utilization level information, the identifier, and a predetermined profile, the predetermined profile being associated with the group and including a network utilization limit.

11. The system of claim 10, wherein the means for receiving comprises:

means for receiving the request from one of a router and a packet switch associated with the one endpoint; and

wherein the system further comprises:

means for forwarding to the router the result of the decision whether to accept the request.

12. The system of claim 11, wherein the router comprises:

a policy enforcement point (PEP); and

wherein the system further comprises:

means for receiving, from the PEP, the request for network resources for a data flow for the one endpoint.

13. The system of claim 12, further comprising:

a server forming a policy decision point, said server including the means for tracking, the means for receiving, and the means for determining.

14. The system of claim 10, wherein the means for determining comprises:

means for applying a policy rule, using the group utilization level information, the identifier, and the predetermined profile to determine whether the group exceeds the network utilization limit.

15. The system of claim 14, wherein the policy rule comprises:

an access control rule, an attempt rate rule, a bandwidth rule, a maximum concurrent flow rule, and a flow time limit rule.

16. The system of claim 10, wherein the group is associated with a reserved bandwidth service logical access port (RLAP), said RLAP including the group; and

wherein the system further comprises:

means for tracking network utilization of the RLAP, the RLAP including the one endpoint to generate RLAP utilization level information corresponding to a current amount of network resource consumption by the RLAP; and

wherein the means for determining further comprises:

means for determining whether the request is to be accepted based on the RLAP utilization level information and another predetermined profile that is associated with the group includes a corresponding network utilization limit.

17. The system of claim 10, further comprising:

means for adjusting the group utilization level information, when the request is accepted, to reflect the installment of the request and the corresponding increase in network resources consumption.

18. The system of claim 17, further comprising:

means for receiving another message corresponding to a discontinuance of the data flow and to the availability of network resources formerly consumed by the data flow; and

means for adjusting the group utilization level information to reflect the availability of the network resources formerly consumed by the data flow.

19. A computer readable medium storing program instructions for execution on a computer system, which when executed by a computer, cause the computer to perform the steps of:

tracking network utilization of a group of endpoints on a network to generate group utilization level information corresponding to a current amount of network resource consumption by the group;

receiving a message corresponding to a request for network resources for a data flow for one of the endpoints, the request including an identifier associated with the one endpoint; and

determining whether the request is to be accepted based on the group utilization level information, the identifier, and a predetermined profile, the predetermined profile being associated with the group and including a network utilization limit.

20. The computer readable medium of claim 19, wherein the step of receiving comprises:

receiving the request from one of a router and a packet switch associated with the one endpoint; and

wherein the computer readable medium further includes program instructions for causing the computer to perform the step of:

forwarding to the router the result of the decision whether to accept the request.

21. The computer readable medium of claim 20, wherein the router is a policy enforcement point (PEP), and the computer readable medium further includes program instructions for causing the computer to perform the step of:

receiving, from the PEP, the request for network resources for a data flow for the one endpoint.

22. The computer readable medium of claim 21, wherein the computer readable medium further comprises program instructions for causing the computer to form a policy decision point independent of said PEP.

23. The computer readable medium of claim 19, wherein the step of determining comprises the step of:

applying a policy rule, using the group utilization level information, the identifier, and the predetermined profile to determine whether the group exceeds the network utilization limit.

24. The computer readable medium of claim 23, wherein the policy rule in the step of applying comprises:

an access control rule, an attempt rate rule, a bandwidth rule, a maximum concurrent flow rule, and a flow time limit rule.

25. The computer readable medium of claim 19, wherein the group is associated with a reserved bandwidth service logical access port (RLAP), and the computer readable medium further includes program instructions for causing the computer to perform the step of:

tracking network utilization of the RLAP, the RLAP including the endpoint to generate RLAP utilization level information corresponding to a current amount of network resource consumption by the RLAP; and

wherein the step of determining comprises the step of:

determining whether the request is to be accepted based on the RLAP utilization level information and another predetermined profile that is associated with the group includes a corresponding network utilization limit.

26. The computer readable medium of claim 19, wherein the computer readable medium further includes program instructions for causing the computer to perform the step of:

adjusting the group utilization level information, when the request is accepted, to reflect the installment of the request and the corresponding increase in network resources consumption.

27. The computer readable medium of claim 26, wherein the computer readable medium further includes program instructions for causing the computer to perform the steps of:

receiving another message corresponding to a discontinuance of the data flow and to the availability of network resources formerly consumed by the data flow; and

adjusting the group utilization level information to reflect the availability of the network resources formerly consumed by the data flow.

28. A memory for storing information for controlling customer resources for network traffic delivery, comprising a data structure including:

a field for storing a first identifier corresponding to a policy enforcement point;

a field for storing a second identifier corresponding to a group of endpoints on a network, the group of endpoints being associated with the policy enforcement point; and  
a field for storing predetermined network utilization limit information for the group.

29. The memory according to claim 28, wherein the field for storing group utilization limit information comprises:

a field for storing a limit for a number of flow request attempts by the group occurring during a time period;

a field for storing a limit for an amount of bandwidth currently in use by the group;  
and

a field for storing a limit for a number of flows currently active for the group.

30. A memory for storing information for controlling customer resources for network traffic delivery, comprising a data structure including:

a field for storing a first identifier corresponding to a policy enforcement point;

a field for storing a second identifier corresponding to a group of endpoints on a network, the group of endpoints being associated with the policy enforcement point; and

a field for storing network utilization level information for the group, the network utilization level information corresponding to a current amount of network resource consumption by the group.

31. The memory of claim 30, wherein the field for storing group utilization level information comprises:



a field for storing a number of flow request attempts by the group occurring during a time period;

a field for storing an amount of bandwidth currently in use by the group; and

a field for storing a number of flows currently active for the group.

# CUSTOMER RESOURCES POLICY CONTROL FOR IP TRAFFIC DELIVERY

## ABSTRACT OF THE DISCLOSURE

A method, system, and computer program product for controlling customer resources for Internet protocol (IP) traffic delivery are disclosed. The network utilization of a group of endpoints on a network is tracked to generate group utilization level information corresponding to a current amount of network resource consumption by the group of endpoints. A request for network resources for a data flow for an endpoint in the group is received from a router associated with that endpoint. The request for network resources includes an identifier associated with the endpoint. A determination is made whether to accept the request based on the group utilization level information, the identifier, and a first predetermined profile associated with the group and including a first network utilization limit.

I:\atty\RCM\9710\97100020.pa.wpd  
Print Time: December 5, 2000 (12:13PM)

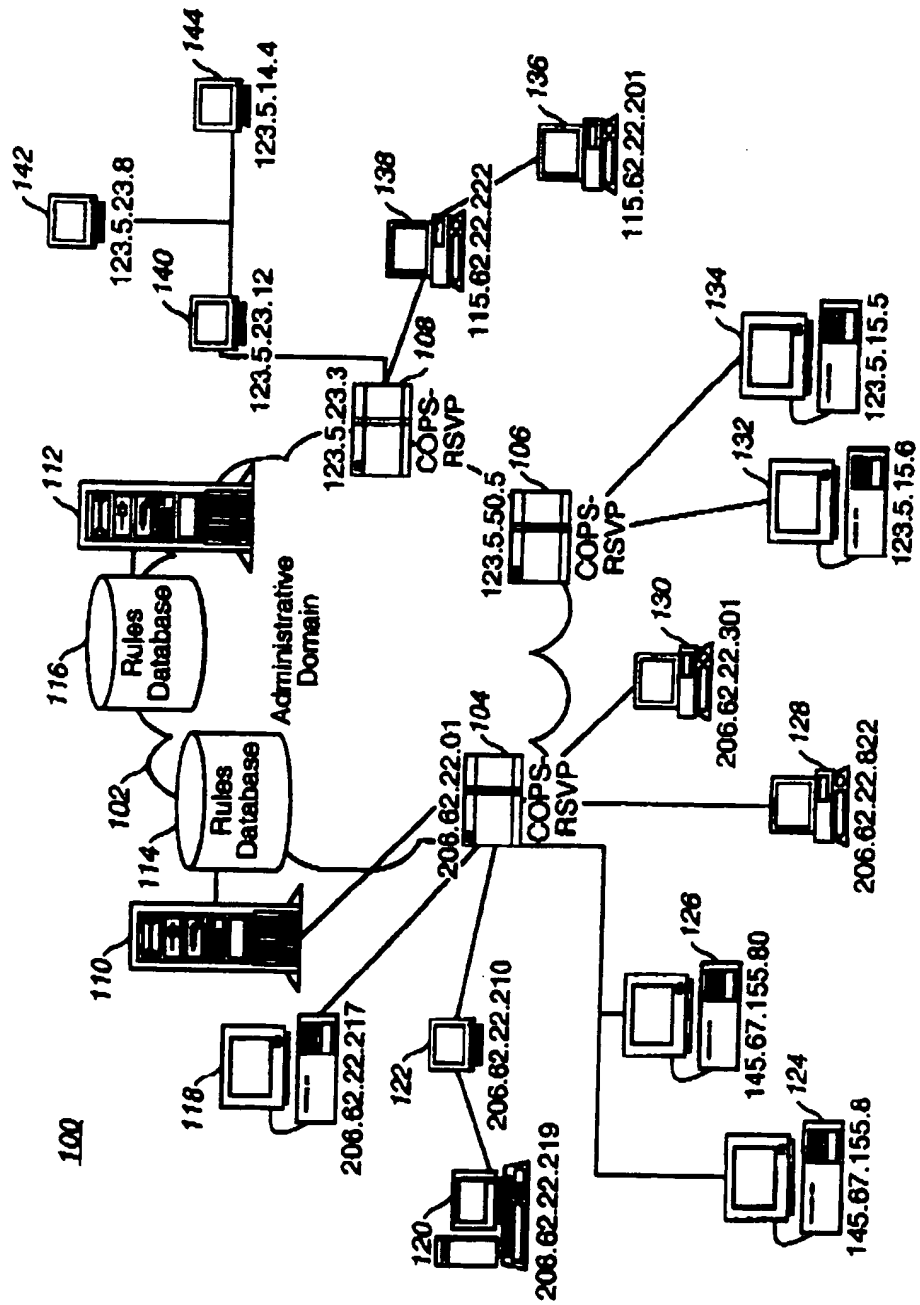


FIG. 1A

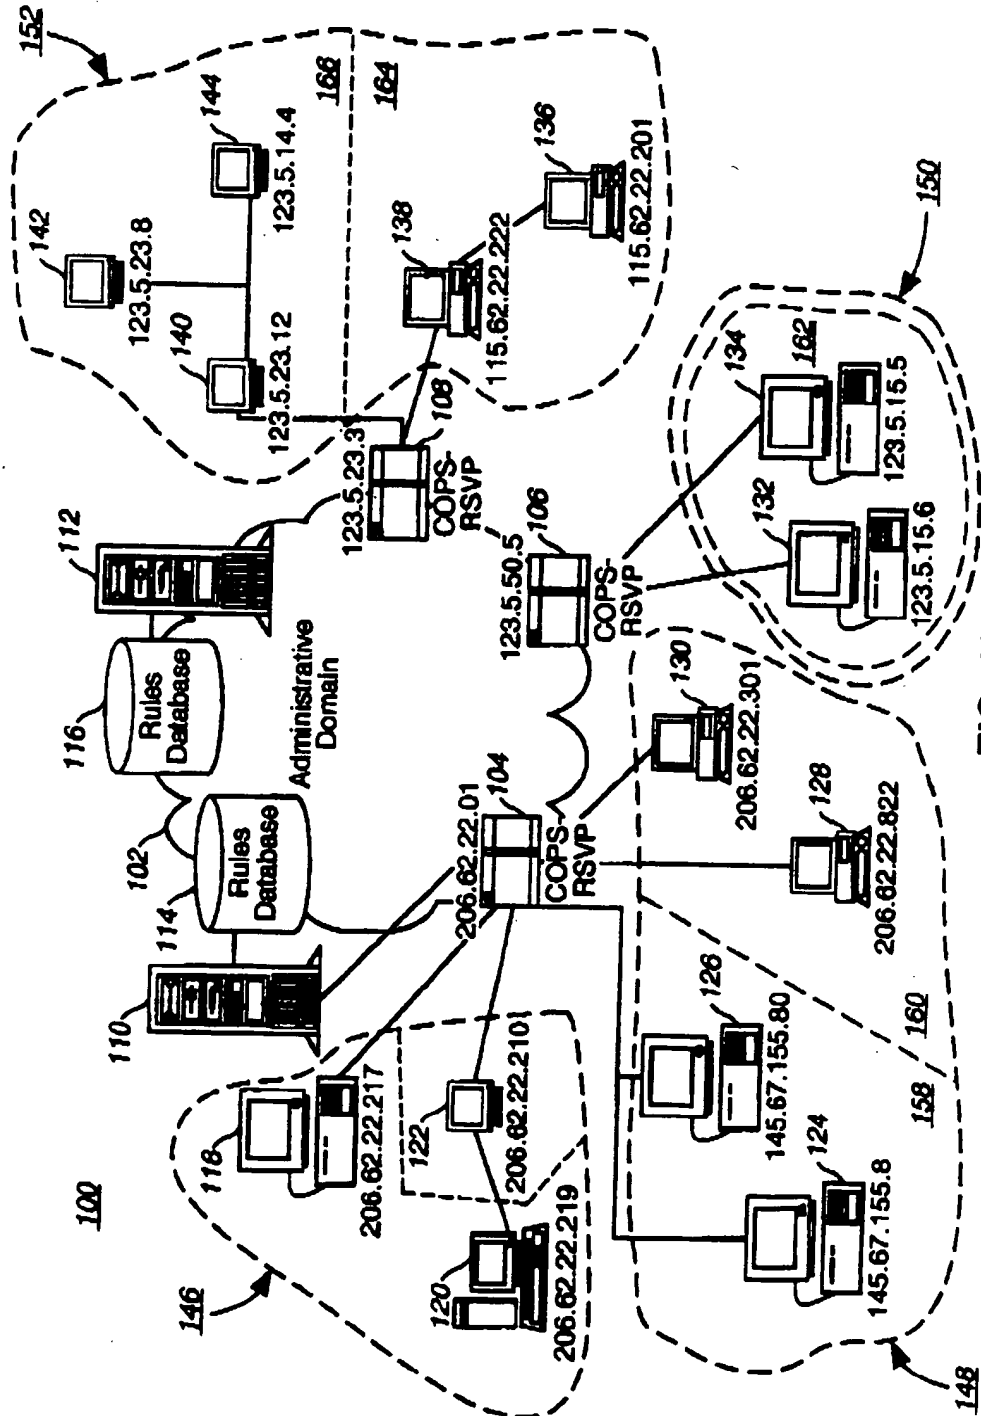


FIG. 1B

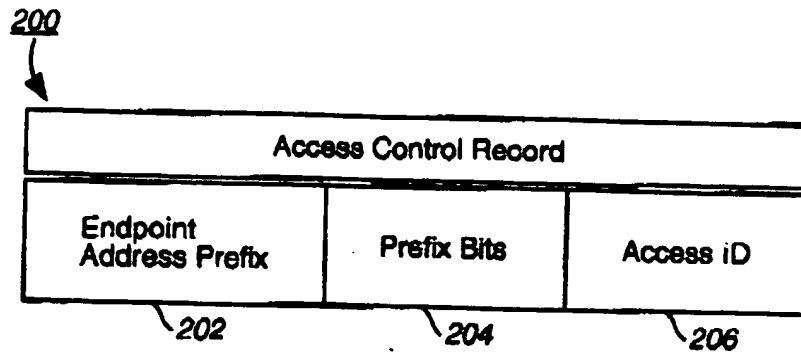


FIG. 2


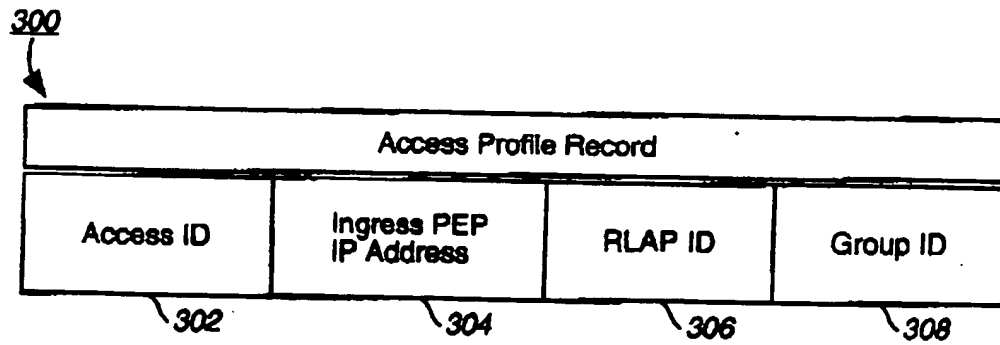


FIG. 3

400

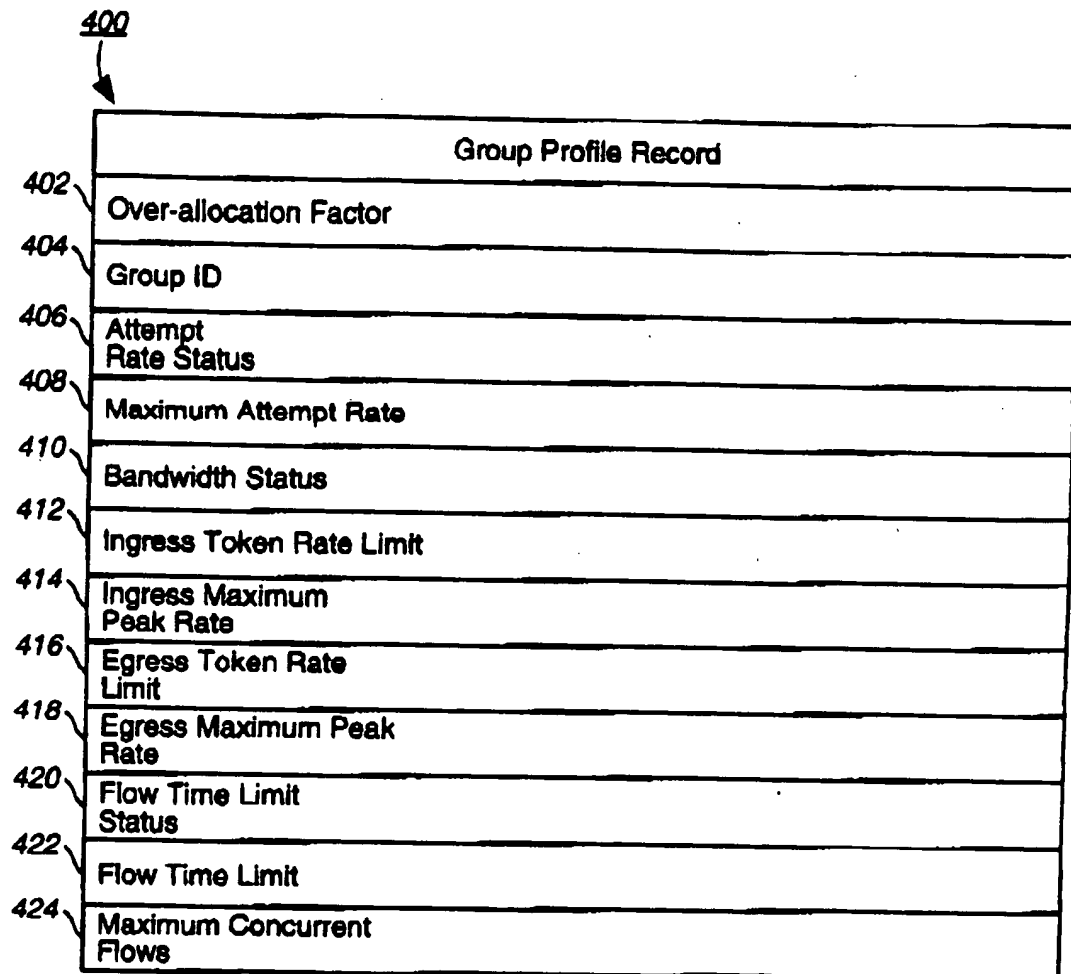

	Group Profile Record
402	Over-allocation Factor
404	Group ID
406	Attempt Rate Status
408	Maximum Attempt Rate
410	Bandwidth Status
412	Ingress Token Rate Limit
414	Ingress Maximum Peak Rate
416	Egress Token Rate Limit
418	Egress Maximum Peak Rate
420	Flow Time Limit Status
422	Flow Time Limit
424	Maximum Concurrent Flows

FIG. 4

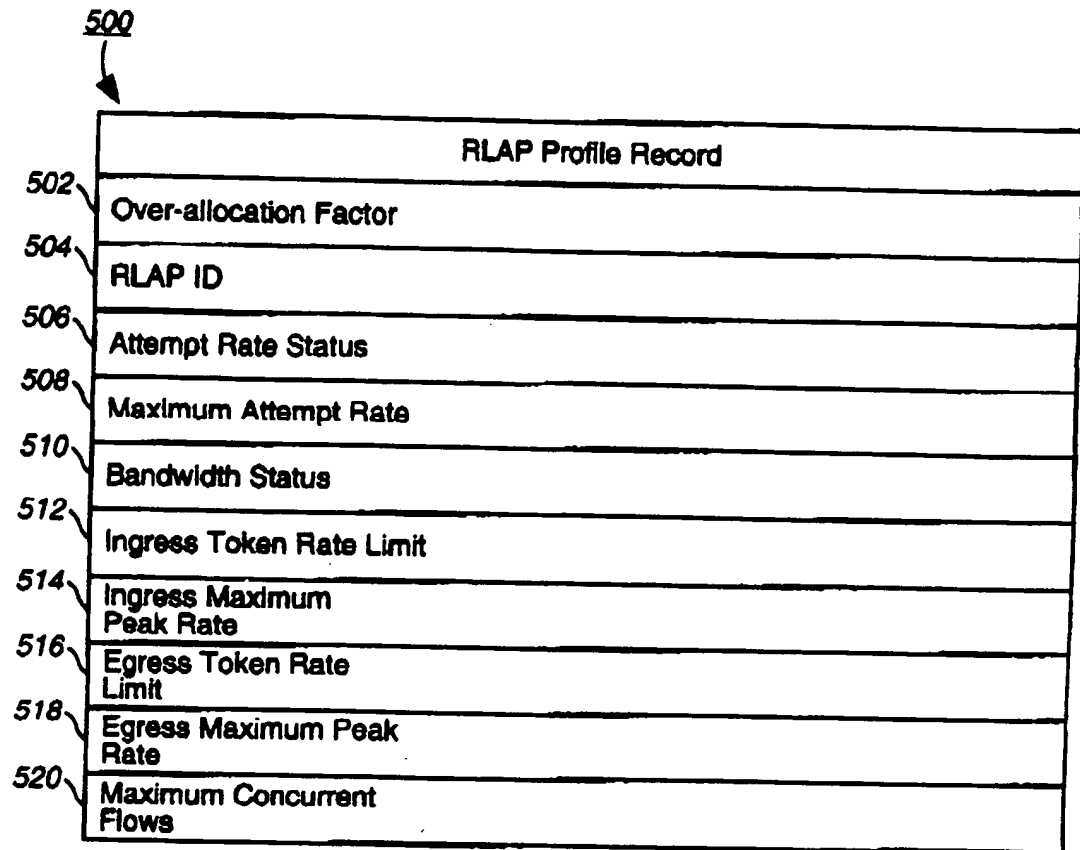


FIG. 5

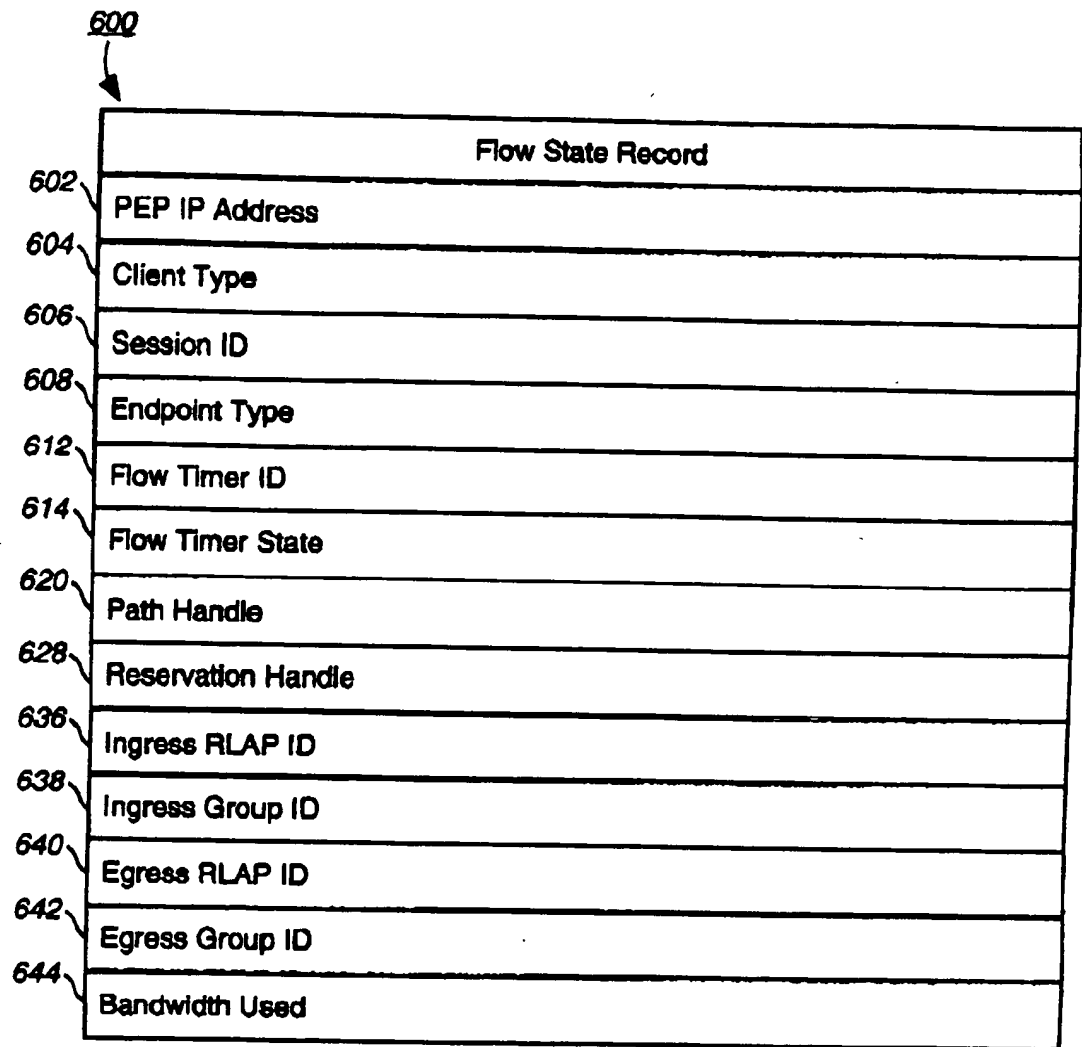


FIG. 6



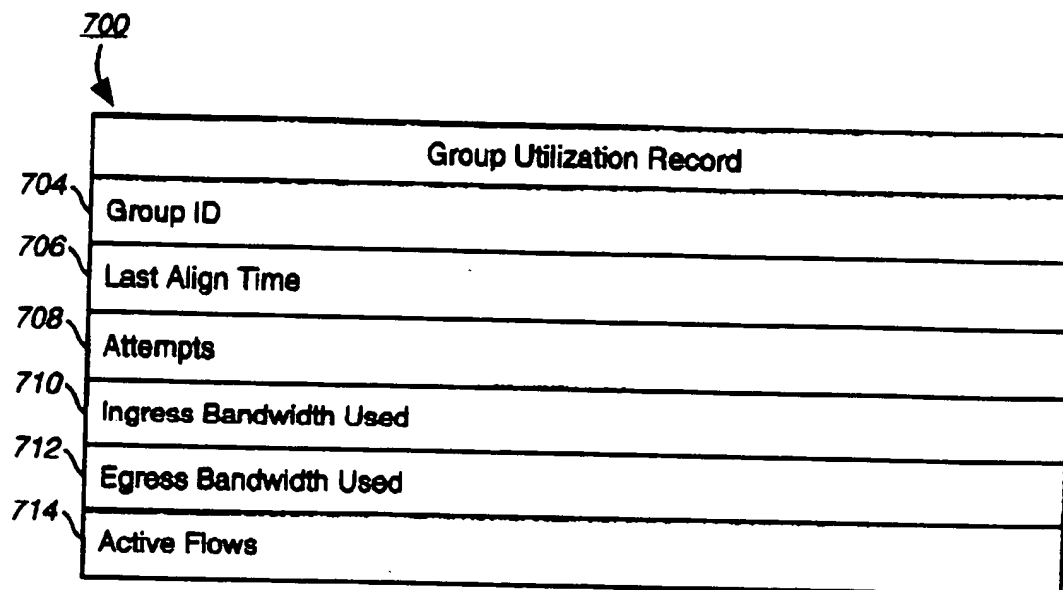


FIG. 7

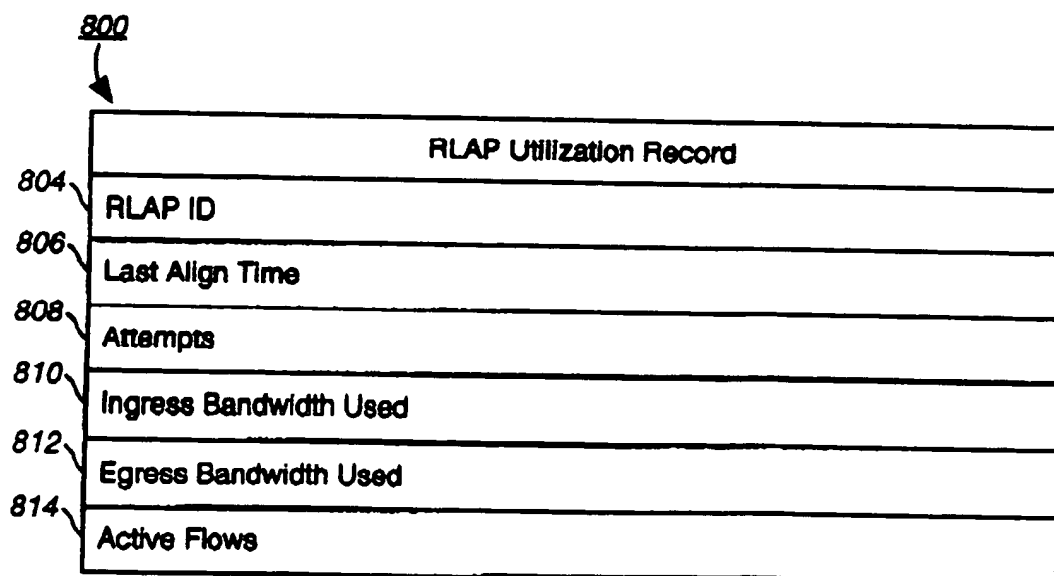


FIG. 8

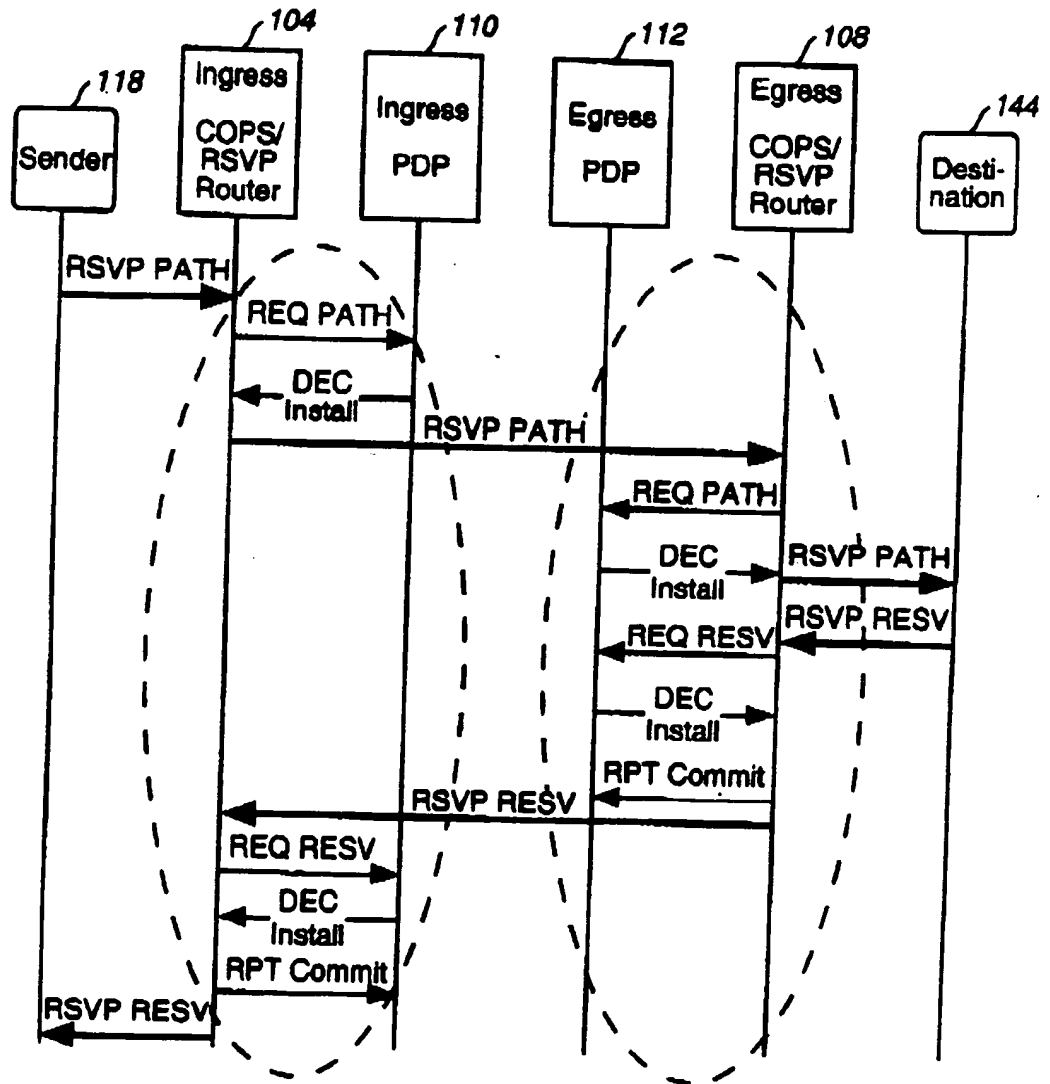


FIG. 9

10/13

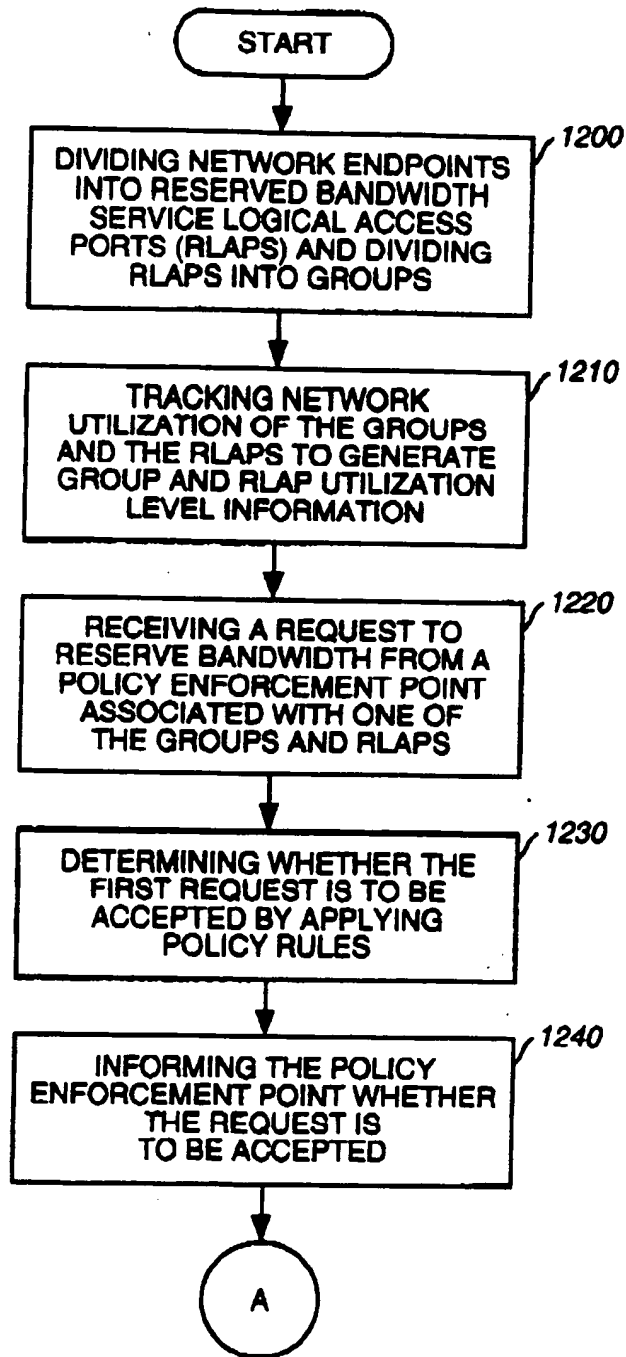


FIG. 12

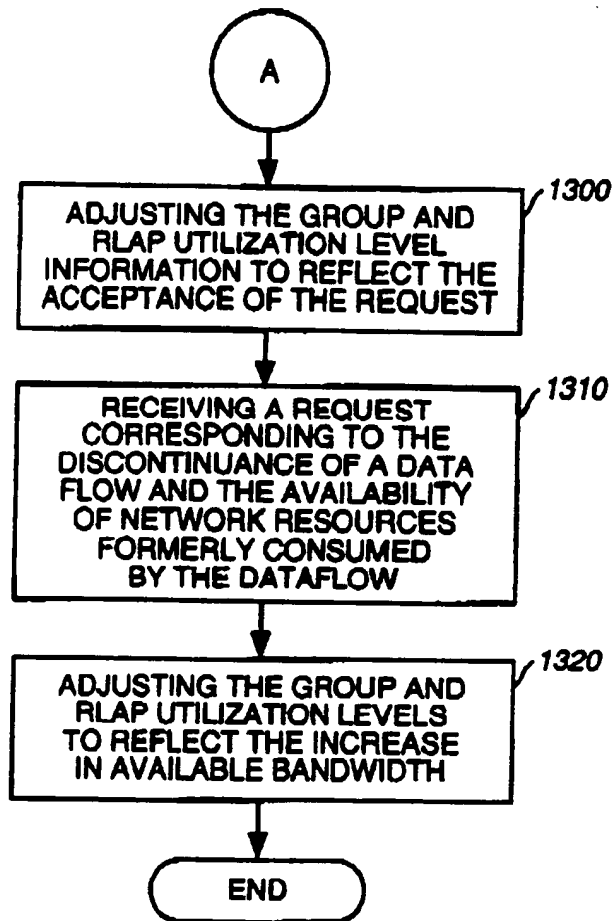


FIG. 13

12/13

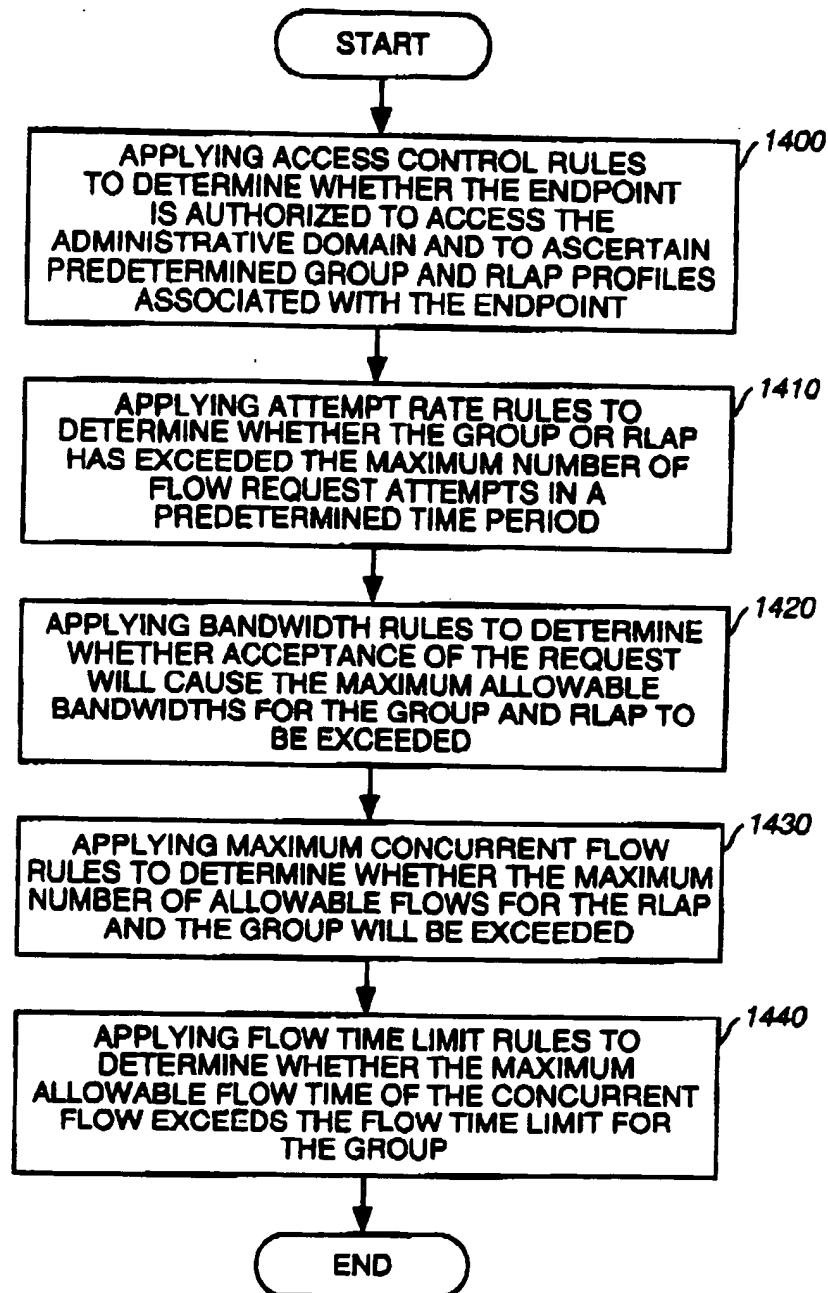


FIG. 14

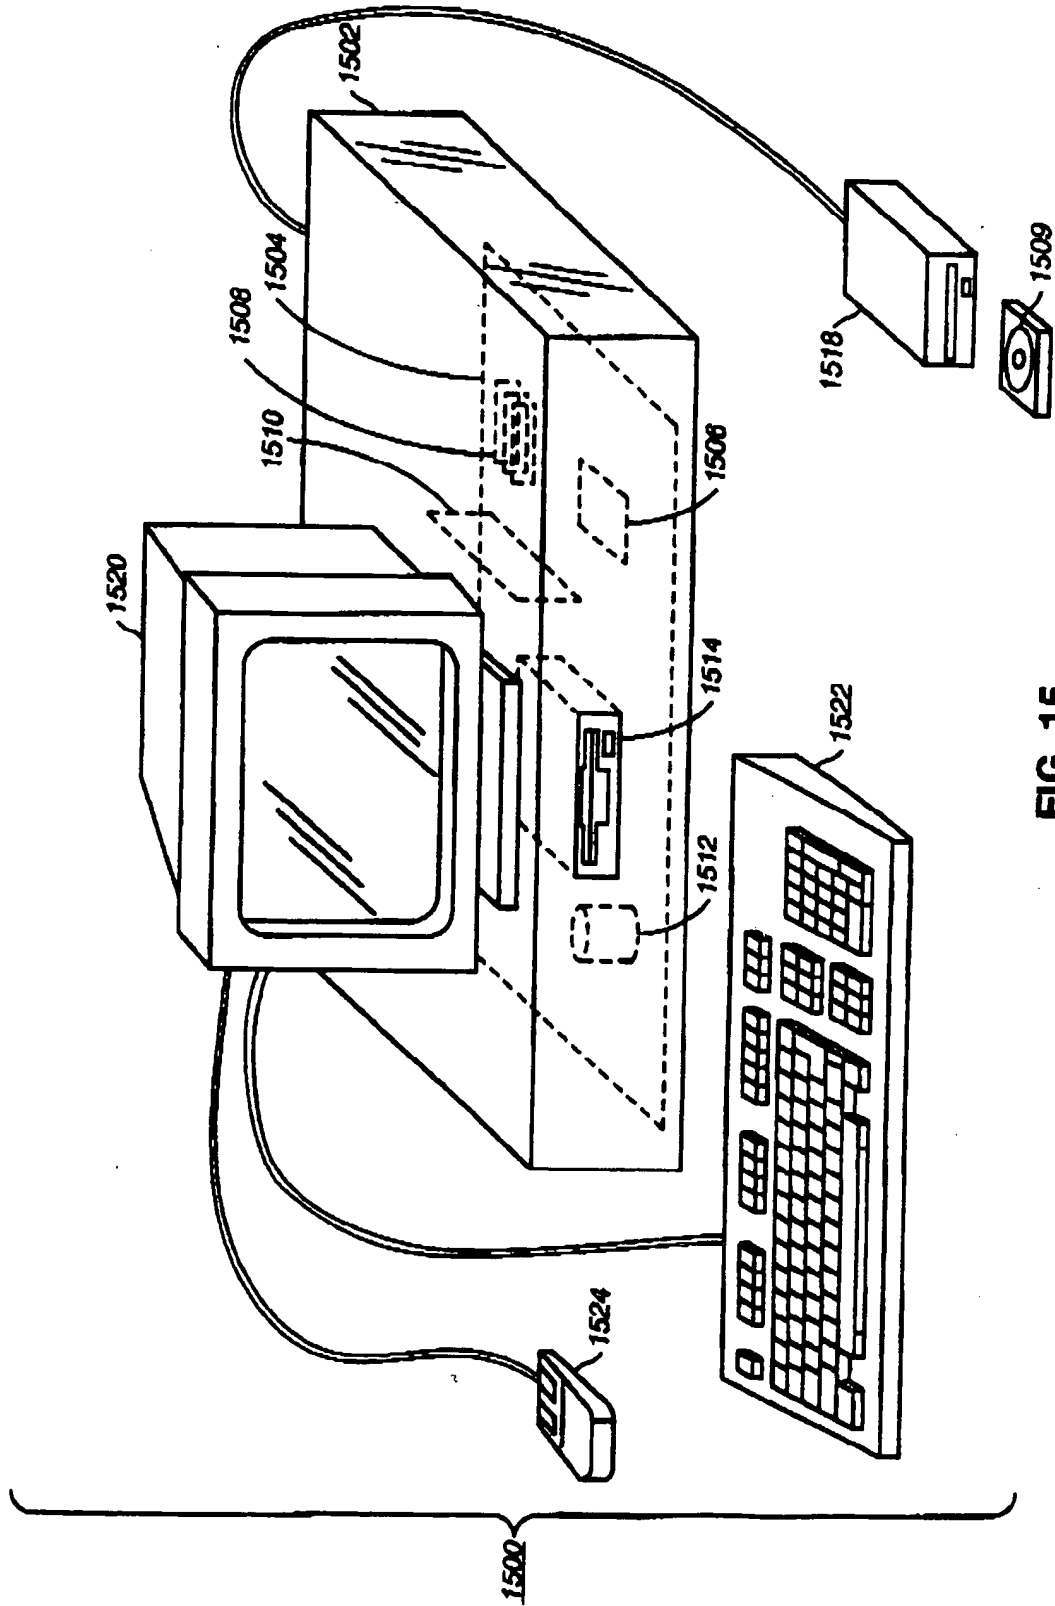
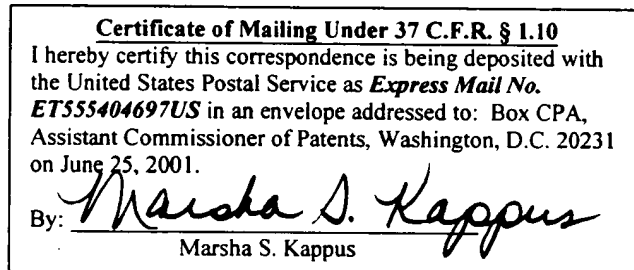


FIG. 15

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application: **Donovan**Application Serial No.: **Unknown**Filed: **June 22, 2001**For: **CUSTOMER RESOURCES  
POLICY CONTROL FOR IP  
TRAFFIC DELIVERY**§  
§  
§  
§  
§  
§  
§Group Art Unit: **Unknown**Examiner: **Unknown**Attorney Docket No.: **RIC-99-027D1**Box CPA  
Assistant Commissioner of Patents  
Washington, D.C. 20231**PRELIMINARY AMENDMENT**

Sir:

No fees in addition to the filing fee other than for three (3) additional independent claims is believed to be necessary at this time. However, in the event that any additional fees are required for the prosecution of this application, please charge any necessary fees to Jones, Day, Reavis & Pogue Deposit Account No. **50-0566**.

Prior to examining the present application, please amend the above-identified application as follows:

**IN THE CLAIMS:**

Please cancel claims **1 - 31** without prejudice.

Please add the following claims:



1 32. A method for creating and using a data structure in a memory for storing information for  
2 controlling customer resources for network traffic delivery comprising:  
3 entering a policy enforcement point (PEP) identifier corresponding to a policy  
4 enforcement point in a first field of the data structure;  
5 entering a group identifier corresponding to the group of endpoints in a second field of  
6 the data structure in the memory, wherein the group of endpoints being associated with the PEP;  
7 entering predetermined network utilization limit information for the group in a third field  
8 of the data structure, wherein the data structure is stored in the memory;  
9 receiving a message corresponding to a request for network resources for a data flow for  
10 one endpoint of the group of endpoints;  
11 accessing said data structure based on information contained within said message; and  
12 responding to said message based on information contained within said data structure.

1 33. The method recited in claim 32, wherein entering predetermined network utilization limit  
2 information for the group in a fourth field further comprises:  
3 entering a limit for a number of flow request attempts by the group occurring during a  
4 time period in a fourth field;  
5 entering a limit for an amount of bandwidth currently in use by the group in a fifth field;  
6 and  
7 entering a limit for a number of flows currently active for the group in a sixth field,  
8 wherein the limit for a number of flow request attempts.

1 34. A method for creating and using a data structure in a memory for storing information for  
2 controlling customer resources for network traffic delivery comprising:

3 entering a policy enforcement point (PEP) identifier corresponding to a PEP in a first  
4 field of the data structure;

5 entering a group identifier corresponding to the group of endpoints in a second field of  
6 the data structure in the memory wherein the group of endpoints being associated with the PEP;

7 entering network utilization level information for the group, the network utilization level  
8 information corresponding to a current amount of network resource consumption by the group in  
9 a third field of the data structure wherein the data structure is stored in the memory;

10 receiving a message corresponding to a request for network resources for a data flow for  
11 one endpoint of the group of endpoints;

12 accessing said data structure based on information contained within said message; and

13 responding to said message based on information contained within said data structure.

1 35. The memory of claim 34 wherein entering network utilization level information for the  
2 group further comprises:

3 entering a number of flow request attempts by the group occurring during a time period  
4 in a fourth field of the data structure;

5 entering an amount of bandwidth currently in use by the group in a fifth field of the data  
6 structure; and

7 entering a number of flows currently active for the group in a sixth field of the data  
8 structure.

1 36. A system for storing and using information in a data structure for controlling customer  
2 resources for network traffic delivery comprising:  
3 storage means for storing a policy enforcement point (PEP) identifier corresponding to a  
4 policy enforcement point in a first field of the data structure in the memory;  
5 storage means for storing a plurality of endpoint identifiers corresponding to a group of  
6 endpoints on a network in a second field of the data structure in the memory;  
7 storage means for storing a group identifier corresponding to the group of endpoints in a  
8 third field of the data structure in the memory, wherein the group of endpoints being associated  
9 with the policy enforcement point (PEP);  
10 storage means for storing predetermined network utilization limit information for the  
11 group in a fourth field of the data structure in the memory;  
12 receiving means for receiving a message corresponding to a request for network  
13 resources for a data flow for one endpoint of the group of endpoints;  
14 accessing means for accessing said data structure based on information contained within  
15 said message; and  
16 response means for responding to said message based on information contained within  
17 said data structure.

1 37. The system recited in claim 36 wherein the storage means for storing predetermined  
2 network utilization limit information further comprises:  
3 storage means for storing a limit for a number of flow request attempts by the group  
4 occurring during a time period in a fifth field;  
5 storage means for storing a limit for an amount of bandwidth currently in use by the  
6 group in a sixth field; and  
7 storage means for storing a limit for a number of flows currently active for the group in a  
8 seventh field wherein the limit for a number of flow request attempts.

1 38. A system for storing and using information in a data structure for controlling customer  
2 resources for network traffic delivery comprising:  
3 storage means for storing a policy enforcement point (PEP) identifier corresponding to a  
4 PEP in a first field of the data structure;  
5 storage means for storing a group identifier corresponding to the group of endpoints in a  
6 second field of the data structure in the memory wherein the group of endpoints being associated  
7 with the PEP;  
8 storage means for storing network utilization level information for the group, the network  
9 utilization level information corresponding to a current amount of network resource consumption  
10 by the group in a third field of the data structure wherein the data structure is stored in the  
11 memory;  
12 receiving means for receiving a message corresponding to a request for network  
13 resources for a data flow for one endpoint of the group of endpoints;  
14 accessing means for accessing said data structure based on information contained within  
15 said message; and  
16 response means for responding to said message based on information contained within  
17 said data structure.

1 39. The system recited in claim 38 wherein the storage means for storing network utilization  
2 level information further comprises:  
3 storage means for storing a number of flow request attempts by the group occurring  
4 during a time period in a fourth field of the data structure;  
5 storage means for storing an amount of bandwidth currently in use by the group in a fifth  
6 field of the data structure; and  
7 storage means for storing a number of flows currently active for the group in a sixth field  
8 of the data structure.

1 40. A computer program product embodied in a computer readable medium for performing a  
2 method for controlling customer resources for network traffic delivery, the computer program  
3 product comprising:

4 instructions for storing a policy enforcement point (PEP) identifier corresponding to a  
5 policy enforcement point in a first field of a data structure;

6 instructions for storing a group identifier corresponding to the group of endpoints in a  
7 second field of the data structure in the memory wherein the group of endpoints being associated  
8 with the PEP;

9 instructions for storing predetermined network utilization limit information for the group  
10 in a third field of the data structure wherein the data structure is stored in the memory;

11 instructions for communicating with a requestor and for receiving a message  
12 corresponding to a request for network resources for a data flow for one endpoint of the group of  
13 endpoints;

14 instructions for accessing said data structure based on information contained within said  
15 message from the requestor; and

16 instructions for responding to said message based on information contained within said  
17 data structure.

1 41. The computer program product recited in claim 40 wherein said instructions for storing  
2 predetermined network utilization limit information for the group further comprise:

3 instructions for storing a limit for a number of flow request attempts by the group  
4 occurring during a time period in a fourth field;

5 instructions for storing a limit for an amount of bandwidth currently in use by the group  
6 in a fifth field; and

7 instructions for storing a limit for a number of flows currently active for the group in a  
8 sixth field wherein the limit for a number of flow request attempts.

1 42. A computer program product embodied in a computer readable medium for performing a  
2 method for controlling customer resources for network traffic delivery, the computer program  
3 product comprising:

4 instructions for storing policy enforcement point (PEP) identifier corresponding to a PEP  
5 in a first field of a data structure;

6 instructions for storing a group identifier corresponding to the group of endpoints in a  
7 second field of the data structure in the memory wherein the group of endpoints being associated  
8 with the PEP;

9 instructions for storing network utilization level information for the group, the network  
10 utilization level information corresponding to a current amount of network resource consumption  
11 by the group in a third field of the data structure wherein the data structure is stored in the  
12 memory;

13 instructions for communicating with a requestor and for receiving a message  
14 corresponding to a request for network resources for a data flow for one endpoint of the group of  
15 endpoints;

16 instructions for accessing said data structure based on information contained within said  
17 message; and

18 instructions for responding to said message based on information contained within said  
19 data structure.

1 43. The computer program product recited in claim 42 wherein the instructions for storing  
2 network utilization level information for the group further comprise:

3 instructions for storing a number of flow request attempts by the group occurring during a  
4 time period in a fourth field of the data structure;

5 instructions for storing an amount of bandwidth currently in use by the group in a fifth  
6 field of the data structure; and

7 instructions for storing a number of flows currently active for the group in a sixth field of  
8 the data structure.

### REMARKS

Claims **32-43** are pending in the present application. Claims **1-31** were canceled and no claims were amended. Consideration of the claims is respectfully requested.

The Examiner is invited to call the undersigned at the below-listed telephone number if, in the opinion of the Examiner, such a telephone conference would expedite or aid the prosecution and examination of this application.

Respectfully submitted,

Date: June 22, 2001



Rudolph J. Buchel, Jr.  
Reg. No. 43,448  
*Jones, Day, Reavis & Pogue*  
P.O. Box 660623  
Dallas, TX 75266-0623  
Telephone: (214) 969-2990  
Facsimile: (214) 969-5100

Attorney for Applicant

## **APPENDIX**

**VERSION WITH MARKINGS TO SHOW CHANGES MADE**



1 --32. A method for creating and using a data structure in a memory for storing information for  
2 controlling customer resources for network traffic delivery comprising:  
3 entering a policy enforcement point (PEP) identifier corresponding to a policy  
4 enforcement point in a first field of the data structure;  
5 entering a group identifier corresponding to the group of endpoints in a second field of  
6 the data structure in the memory wherein the group of endpoints being associated with the PEP;  
7 entering predetermined network utilization limit information for the group in a third field  
8 of the data structure wherein the data structure is stored in the memory;  
9 receiving a message corresponding to a request for network resources for a data flow for  
10 one endpoint of the group of endpoints;  
11 accessing said data structure based on information contained within said message; and  
12 responding to said message based on information contained within said data structure.--

1 --33. The method recited in claim 32 wherein entering predetermined network utilization limit  
2 information for the group in a fourth field further comprises:

3 entering a limit for a number of flow request attempts by the group occurring during a  
4 time period in a fourth field;

5 entering a limit for an amount of bandwidth currently in use by the group in a fifth field;  
6 and

7 entering a limit for a number of flows currently active for the group in a sixth field  
8 wherein the limit for a number of flow request attempts.--

1 --34. A method for creating and using a data structure in a memory for storing information for  
2 controlling customer resources for network traffic delivery comprising:

3 entering a policy enforcement point (PEP) identifier corresponding to a PEP in a first  
4 field of the data structure;

5 entering a group identifier corresponding to the group of endpoints in a second field of  
6 the data structure in the memory wherein the group of endpoints being associated with the PEP;

7 entering network utilization level information for the group, the network utilization level  
8 information corresponding to a current amount of network resource consumption by the group in  
9 a third field of the data structure wherein the data structure is stored in the memory;

10 receiving a message corresponding to a request for network resources for a data flow for  
11 one endpoint of the group of endpoints;

12 accessing said data structure based on information contained within said message; and

13 responding to said message based on information contained within said data structure.--

1 --35. The memory of claim 34 wherein entering network utilization level information for the  
2 group further comprises:

3 entering a number of flow request attempts by the group occurring during a time period  
4 in a fourth field of the data structure;

5 entering an amount of bandwidth currently in use by the group in a fifth field of the data  
6 structure; and

7 entering a number of flows currently active for the group in a sixth field of the data  
8 structure.--

1 --36. A system for storing and using information in a data structure for controlling customer  
2 resources for network traffic delivery comprising:  
3 storage means for storing a policy enforcement point (PEP) identifier corresponding to a  
4 policy enforcement point in a first field of the data structure in the memory;  
5 storage means for storing a plurality of endpoint identifiers corresponding to a group of  
6 endpoints on a network in a second field of the data structure in the memory;  
7 storage means for storing a group identifier corresponding to the group of endpoints in a  
8 third field of the data structure in the memory wherein the group of endpoints being associated  
9 with the policy enforcement point (PEP);  
10 storage means for storing predetermined network utilization limit information for the  
11 group in a fourth field of the data structure in the memory;  
12 receiving means for receiving a message corresponding to a request for network  
13 resources for a data flow for one endpoint of the group of endpoints;  
14 accessing means for accessing said data structure based on information contained within  
15 said message; and  
16 response means for responding to said message based on information contained within  
17 said data structure.--

1 --37. The system recited in claim 36 wherein the storage means for storing predetermined  
2 network utilization limit information further comprises:  
3 storage means for storing a limit for a number of flow request attempts by the group  
4 occurring during a time period in a fifth field;  
5 storage means for storing a limit for an amount of bandwidth currently in use by the  
6 group in a sixth field; and  
7 storage means for storing a limit for a number of flows currently active for the group in a  
8 seventh field wherein the limit for a number of flow request attempts.--

1 --38. A system for storing and using information in a data structure for controlling customer  
2 resources for network traffic delivery comprising:  
3 storage means for storing a policy enforcement point (PEP) identifier corresponding to a  
4 PEP in a first field of the data structure;  
5 storage means for storing a group identifier corresponding to the group of endpoints in a  
6 second field of the data structure in the memory wherein the group of endpoints being associated  
7 with the PEP;  
8 storage means for storing network utilization level information for the group, the network  
9 utilization level information corresponding to a current amount of network resource consumption  
10 by the group in a third field of the data structure wherein the data structure is stored in the  
11 memory;  
12 receiving means for receiving a message corresponding to a request for network  
13 resources for a data flow for one endpoint of the group of endpoints;  
14 accessing means for accessing said data structure based on information contained within  
15 said message; and  
16 response means for responding to said message based on information contained within  
17 said data structure.--

1 --39. The system recited in claim 38 wherein the storage means for storing network utilization  
2 level information further comprises:  
3 storage means for storing a number of flow request attempts by the group occurring  
4 during a time period in a fourth field of the data structure;  
5 storage means for storing an amount of bandwidth currently in use by the group in a fifth  
6 field of the data structure; and  
7 storage means for storing a number of flows currently active for the group in a sixth field  
8 of the data structure.--

1 --40. A computer program product embodied in a computer readable medium for performing a  
2 method for controlling customer resources for network traffic delivery, the computer program  
3 product comprising:

4 instructions for storing a policy enforcement point (PEP) identifier corresponding to a  
5 policy enforcement point in a first field of a data structure;

6 instructions for storing a group identifier corresponding to the group of endpoints in a  
7 second field of the data structure in the memory wherein the group of endpoints being associated  
8 with the PEP;

9 instructions for storing predetermined network utilization limit information for the group  
10 in a third field of the data structure wherein the data structure is stored in the memory;

11 instructions for communicating with a requestor and for receiving a message  
12 corresponding to a request for network resources for a data flow for one endpoint of the group of  
13 endpoints;

14 instructions for accessing said data structure based on information contained within said  
15 message from the requestor; and

16 instructions for responding to said message based on information contained within said  
17 data structure.--

1 --41. The computer program product recited in claim 40 wherein said instructions for storing  
2 predetermined network utilization limit information for the group further comprise:

3 instructions for storing a limit for a number of flow request attempts by the group  
4 occurring during a time period in a fourth field;

5 instructions for storing a limit for an amount of bandwidth currently in use by the group  
6 in a fifth field; and

7 instructions for storing a limit for a number of flows currently active for the group in a  
8 sixth field wherein the limit for a number of flow request attempts.--

1 --42. A computer program product embodied in a computer readable medium for performing a  
2 method for controlling customer resources for network traffic delivery, the computer program  
3 product comprising:

4 instructions for storing policy enforcement point (PEP) identifier corresponding to a PEP  
5 in a first field of a data structure;

6 instructions for storing a group identifier corresponding to the group of endpoints in a  
7 second field of the data structure in the memory wherein the group of endpoints being associated  
8 with the PEP;

9 instructions for storing network utilization level information for the group, the network  
10 utilization level information corresponding to a current amount of network resource consumption  
11 by the group in a third field of the data structure wherein the data structure is stored in the  
12 memory;

13 instructions for communicating with a requestor and for receiving a message  
14 corresponding to a request for network resources for a data flow for one endpoint of the group of  
15 endpoints;

16 instructions for accessing said data structure based on information contained within said  
17 message; and

18 instructions for responding to said message based on information contained within said  
19 data structure.--

1 --43. The computer program product recited in claim 42 wherein the instructions for storing  
2 network utilization level information for the group further comprise:

3 instructions for storing a number of flow request attempts by the group occurring during a  
4 time period in a fourth field of the data structure;

5 instructions for storing an amount of bandwidth currently in use by the group in a fifth  
6 field of the data structure; and

7 instructions for storing a number of flows currently active for the group in a sixth field of  
8 the data structure.--

## DECLARATION AND POWER OF ATTORNEY FOR UTILITY PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

### Customer Resources Policy Control for IP Traffic Delivery

the specification of which

☒ is attached hereto  
☐ was filed on \_\_\_\_\_ as Application Serial No.  
 and was amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I do not know and do not believe that the same was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof of more than one year prior to this application, and said invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(s) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of this application on which priority is claimed.

#### Prior Foreign Application(s)

(number)	(country)	(date filed)
----------	-----------	--------------

#### Priority Claimed

☐ yes ☐ no

(number)	(country)	(date filed)
----------	-----------	--------------

☐ yes ☐ no

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

(Application Number(s))

(Filing Date month/day/yy)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or Section 365(e) of any PCT international application designating the United States of America, listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Serial No.)

(Filing date)

(Inventor)

I hereby appoint Timothy D. Casey, Reg. No. 33,124; Albert M. Crowder, Jr., Reg. No. 28,063; Jubin Dena, Reg. No. 41,400; Carl Evans, Reg. No. 33,874; Deborah Miller, Reg. No. 37,679; Stephen Penick, Reg. No. 40,125; Craig L. Plastrik, Reg. No. 41,254; Paul A. Roberts, Reg. No. 40,289; and Jessica Young, Reg. No. 39,884 my attorneys and Satishesh Karna, Reg. No. 40,246 my patent agent with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to:  
Technology Law Department  
MCI WORLDWIDE, Inc.  
1133 19<sup>th</sup> STREET NW  
WASHINGTON, D.C. 20036

Direct Telephone Calls To:  
(202) 736-6604

I hereby declare that all statements made herein of my knowledge are true and that all statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of Sole or First Inventor: Steven Robert Donovan  
P.O./Residence Address: 704 Forest Bend Drive, Plano, Texas 75025  
Citizenship: USA

Signature: Steven Robert Donovan Date: 10/8/99

Full name of Additional Joint Inventor, if any: Diana J. Rawlins  
P.O./Residence Address: 318 Northview Drive, Richardson, Texas 75080  
Citizenship: USA

Signature: Diana J. Rawlins Date: 10/08/99



Full name of Additional Joint Inventor, if any: John K. Gallant  
P.O./Residence Address: 1800 Azurite Trail, Plano, Texas 75075  
Citizenship: USA

Signature: John K. Gallant Date: 10/5/99

Full name of Additional Joint Inventor, if any:  
P.O./Residence Address:  
Citizenship:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Full name of Additional Joint Inventor, if any:  
P.O./Residence Address:  
Citizenship:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Full name of Additional Joint Inventor, if any:  
P.O./Residence Address:  
Citizenship:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Full name of Additional Joint Inventor, if any:  
P.O./Residence Address:  
Citizenship:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Full name of Additional Joint Inventor, if any:  
P.O./Residence Address:  
Citizenship:

Signature: \_\_\_\_\_ Date: \_\_\_\_\_